


## Thermal Link A-1A-F Series

## 1A Series

### Key Features

- Plastic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

### Dimensions

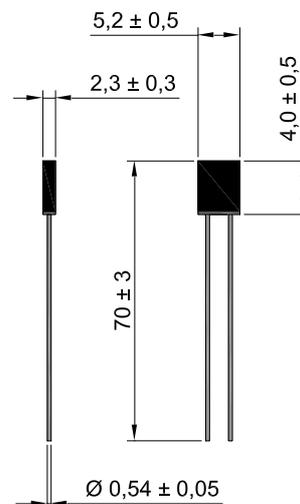

### Specification

Model	T <sub>f</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>							
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	VDE	PSE	CCC	KTL	RoHS REACH
A0-1A-F	84	82±2	65	203	1	AC 250	●	●	●	●			●
A1-1A-F	102	98±2	80	203	1	AC 250	●	●	●	●	●	●	●
A2-1A-F	115	112±3	99	203	1	AC 250	●	●	●	●	●	●	●
A3-1A-F	125	120±3	105	203	1	AC 250	●	●	●	●	●	●	●
A4-1A-F	130	126±2	107	203	1	AC 250	●	●	●	●	●	●	●
A5-1A-F	135	131±3	115	203	1	AC 250	●	●	●	●	●	●	●
A7-1A-F	138	135±2	118	203	1	AC 250	●	●	●	●	●	●	●
A12-1A-F	145	140±2	126	203	1	AC 250	●	●	●	●	●	●	●
A8-1A-F	150	145±3	128	203	1	AC 250	●	●	●	●	●	●	●
A16-1A-F	160	155±3	140	203	1	AC 250	●	●	●	●	●	●	●