


## Organic Thermal Link BF Series

## 10A Series

### Key Features


- Metal case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant
- Bulk or Tape & Reel packing

### Dimensions

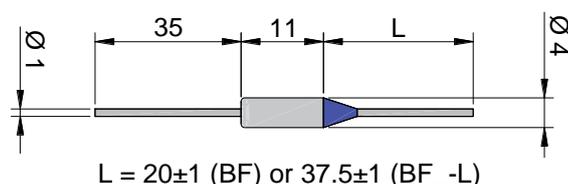

### Specification

Model	T <sub>r</sub>	Fusing Temp.	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>							
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	VDE	PSE	CCC	KTL	RoHS REACH
BF73	73	70±2	58	175	10	AC 250	●	●	●	○	●	○	●
BF77	77	76+0/-4	62	175	10	AC 250	●	●	●	○	●	○	●
BF84	84	82±2	69	175	10	AC 250	●	●	●	○	●	○	●
BF94	94	91±3	79	175	10	AC 250	●	●	●	○	●	○	●
BF99	99	96±2	84	175	10	AC 250	●	●	●	○	●	○	●
BF104	104	100±2	90	175	10	AC 250	●	●	●	○	●	○	●
BF113	113	109+3/-1	98	175	10	AC 250	●	●	●	○	●	○	●
BF117	117	115±2	102	175	10	AC 250	●	●	●	○	●	○	●
BF121	121	119+2/-3	106	175	10	AC 250	●	●	●	○	●	○	●
BF133	133	129±2	119	215	10	AC 250	●	●	●	○	●	○	●
BF142	142	139+2/-3	127	215	10	AC 250	●	●	●	○	●	○	●
BF157	157	152±2	143	250	10	AC 250	●	●	●	○	●	○	●
BF172	172	169+3/-1	157	260	10	AC 250	●	●	●	○	●	○	●
BF184	184	182+2/-3	169	260	10	AC 250	●	●	●	○	●	○	●
BF192	192	188±3	177	390	10	AC 250	●	●	●	○	●	○	●
BF216	216	214+2/-3	201	390	10	AC 250	●	●	●	○	●	○	●
BF229	229	226+3/-2	201	390	10	AC 250	●	●	●	○	●	○	●
BF240	240	235±3	201	450	10	AC 250	●	●	●	○	●	○	●
BF257	257	254±3	201	450	10	AC 250	●	●	○	○	○	○	●

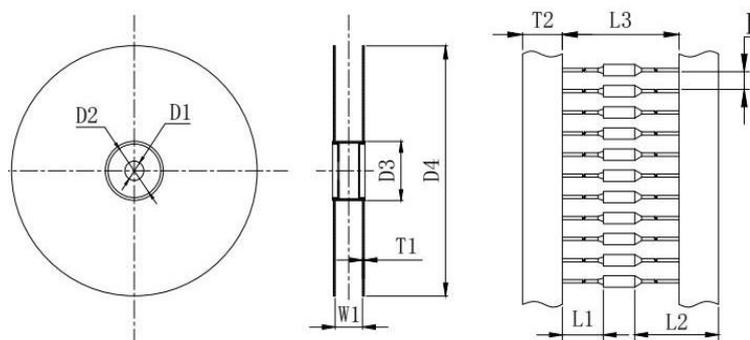

### Tape & Reel Dimensions

No.	D1	D2	D3	D4	W1	T1	L1	L2	L3	T2	P
Dimensions	Ø31.5±1	Ø73	Ø89	Ø320±5	87±1	2.5±0.5	29-30	39±1	74±1	6±0.5	4±0.5

Dimensions in mm

Changes and errors excepted