



## Description

Inrush Current Limiting NTC Thermistor is a temperature sensitive resistor made of special semiconductor ceramic material with Negative Temperature Coefficient characteristics. They have a higher resistance value at room temperature. When they are energized, the temperature of the resistor body increases due to self-heating, and the resistance value decreases. Using this feature, they are used as Inrush current limiting/protection components for electrical and electronic equipment. These devices can easily and effectively limit abnormal currents, including surge currents when energized. Inrush Current Limiting NTC Thermistors used as current protection devices are also called power thermistors.

## Applications

- Switch-Mode Power Supplies
- Transformers
- Inverters
- Soft-Start Motors
- LED Driver Circuit
- Halogen Lamp


## Features

- Miniaturized Size
- RoHS & REACH Compliant
- -40 °C to 175 °C Operating Temperature Range
- Wide Product Diameter Range from Φ5 mm to Φ30 mm
- Silicone Sealing Material, Flame-Retardant to V0 (UL 94)




## Benefits

- Fast Response
- Strong Surge Suppression Capability
- High Stable Electrical Characteristics
- The Material Constant (B value) is Large and the Residual Resistance is Small
- New Ceramic Material and Homogenization Process for a Volume-efficient, High-performance Design

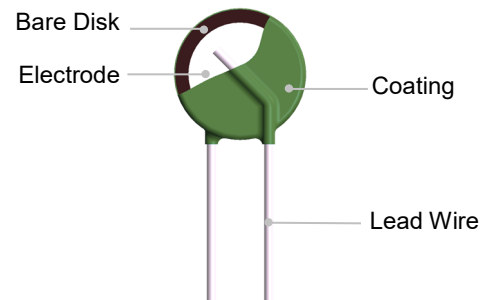
## Product Structure




## Agency Approvals

Agency	Standards	No.
	UL 1434	on request
	IEC 60539-1	on request
	GB_T 6663.1	on request


### Part Numbering System

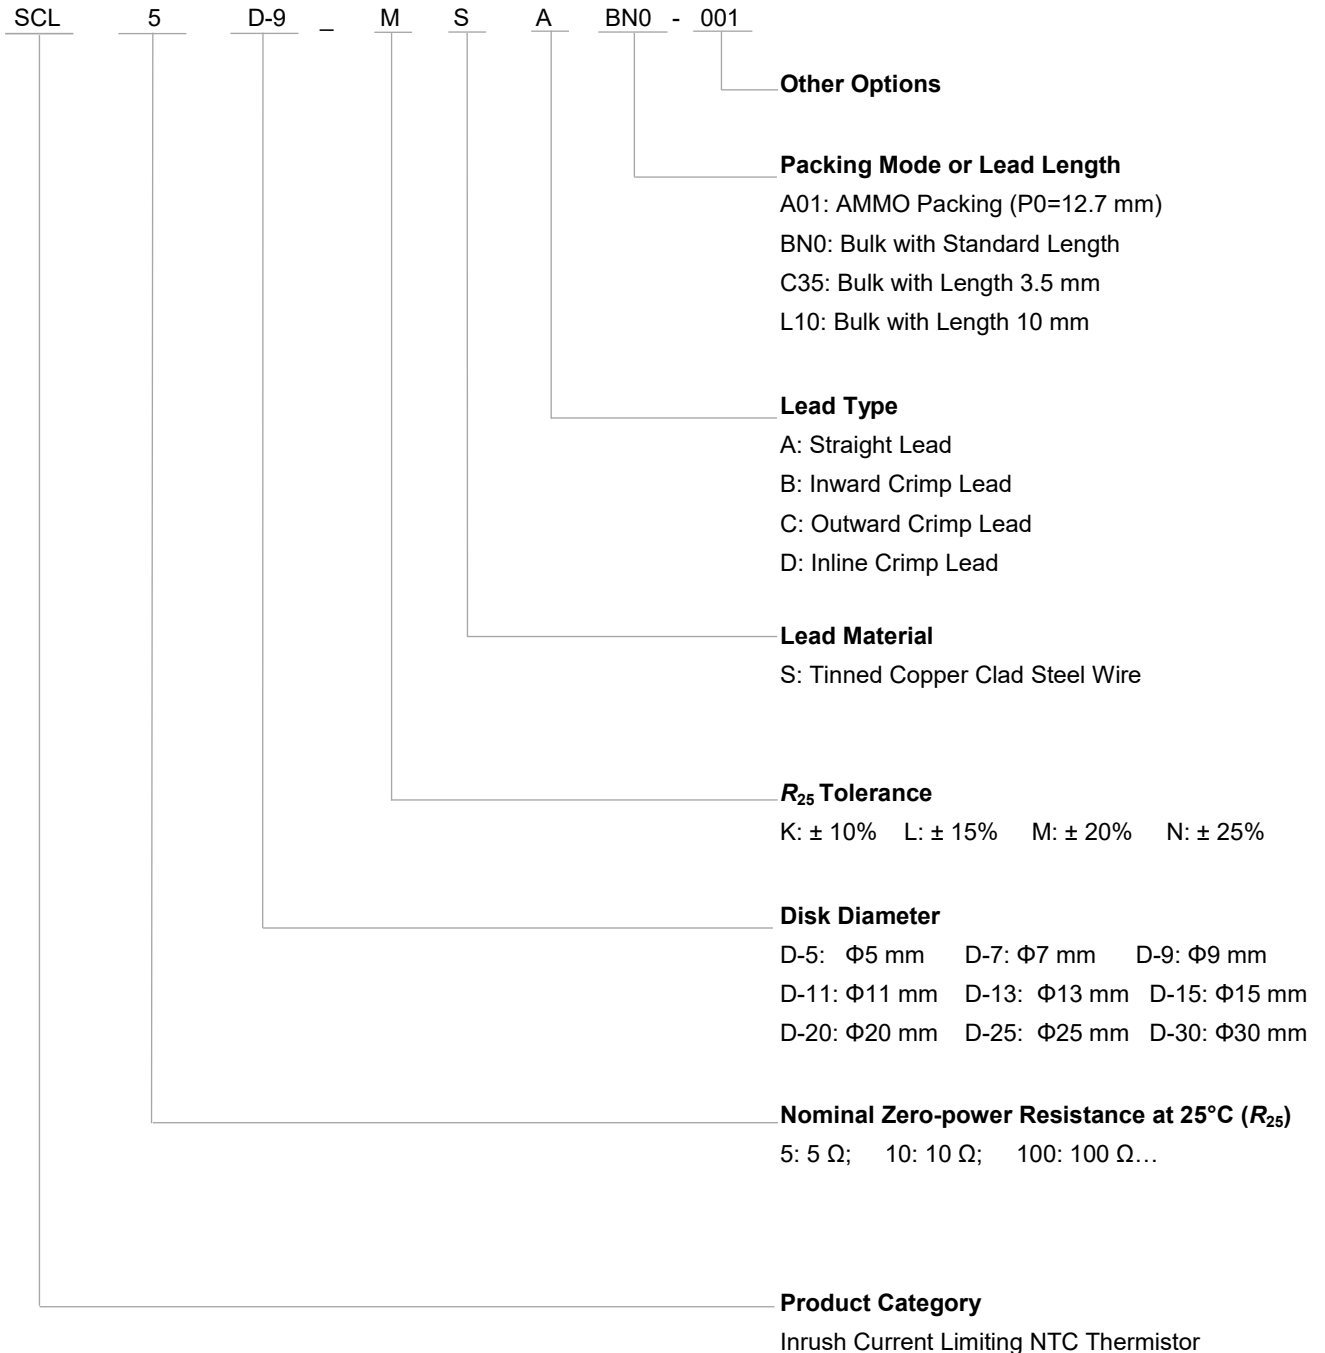

### Marking

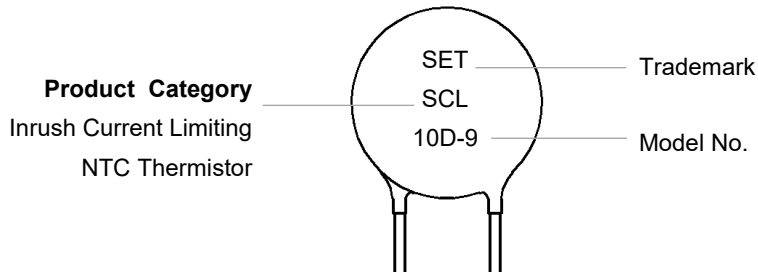


### Dimensions (mm)

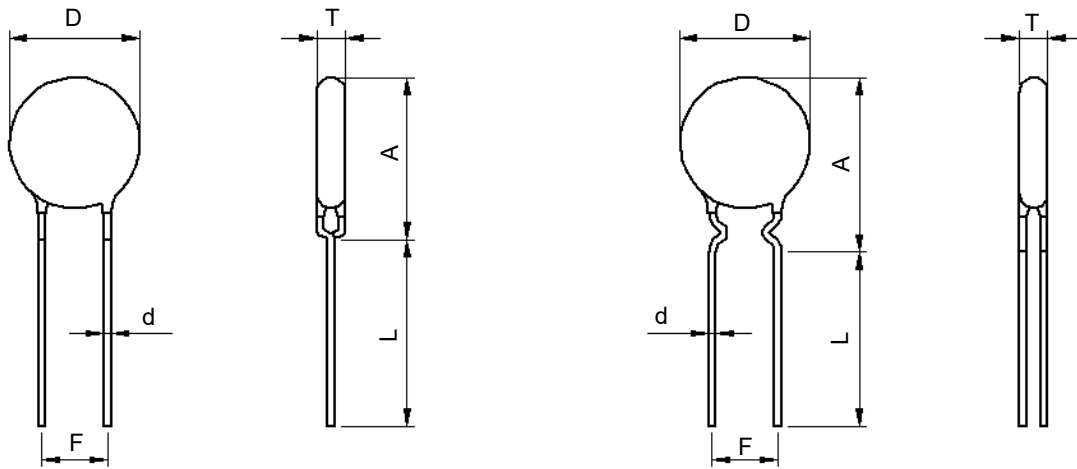

Inline Crimp Lead

Inward Crimp Lead

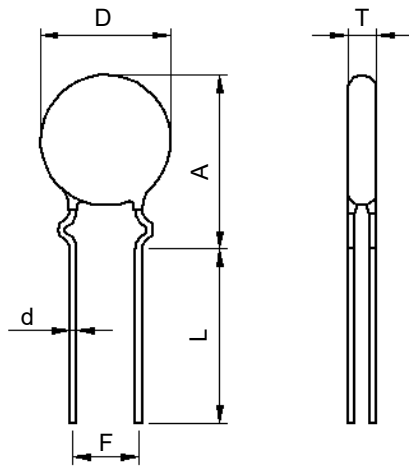

Outward Crimp Lead

D Max.	F ± 1.0	d ± 0.05	A Max.	L Min.	T Max.
11.0	5.0	Φ0.8	16.0	20.0	5.5

Note: Alternative lead configurations available on request.


## Glossary

Item	Description
$R_{25}$	<p><b>Nominal Zero Power Resistance at 25 °C</b></p> <p>Nominal value of zero-power resistance at the standard reference temperature of 25 °C, unless otherwise specified. — (IEC 60539)</p>
$I_{max25}$	<p><b>Maximum Current at 25 °C</b></p> <p>Maximum value of current (d.c. or r.m.s. values for Sine wave shaped a.c.) which can be continuously applied to the thermistor at an ambient temperature of 25 °C. — (IEC 60539)</p>
$B$	<p><b>B value</b></p> <p>Index of thermal sensitivity expressed by the formula</p> $B = \frac{T_a \times T_b}{T_b - T_a} \times \ln \frac{R_a}{R_b}$ <p><math>R_a</math> is the zero-power resistance (<math>\Omega</math>) at temperature <math>T_a</math> (k)  <math>R_b</math> is the zero-power resistance (<math>\Omega</math>) at temperature <math>T_b</math> (k)  <math>T_a = 298.15</math> K, <math>T_b = 358.15</math> K — (IEC 60539)</p>
$\delta$	<p><b>Dissipation Factor</b></p> <p>Power dissipation required for a thermistor to raise its temperature by 1 K and which is generally the ratio of the power dissipation change to the resulting thermistor body temperature change at a specified ambient temperature. — (IEC 60539)</p>
$\tau_a$	<p><b>Thermal Time Constant</b></p> <p>Time required for a thermistor to respond to 63.2 % of an external step change in ambient temperature in a defined medium. — (IEC 60539)</p>
$R_{min@I_{max25}}$	<p><b>Residual Resistance</b></p> <p>Inrush Current-limiting Thermistors value of the d.c. resistance of a thermistor when its thermal stability is reached with the maximum current passing. — (IEC 60539)</p>
$C_{max}$	<p><b>Maximum Permissible Capacitance</b></p> <p>Maximum permissible capacitance value of a capacitor which can be connected to a thermistor under loading. — (IEC 60539)</p>
$P_{max25}$	<p><b>Maximum Power Dissipation</b></p> <p>Maximum value of the power dissipation which can be continuously applied to the thermistor at 25 °C. — (IEC 60539)</p>

## Electrical Specifications

Model	$R_{25}$	$I_{max25}$	$B_{25/85}$	$\delta$	$\tau_a$	$R_{min}@I_{max25}$	$C_{max}$		$P_{max}$	Operating Temperature Range
	( $\Omega$ )	(A)	(K)	(mW/K)	(s)	( $\Omega$ )	@120Vac ( $\mu$ F)	@240Vac ( $\mu$ F)	(W)	( $^{\circ}$ C)
SCL1D-9	1	5.0	2600	$\geq 11$	$\leq 70$	0.06	1000	250	2.0	-40 ~ 175
SCL1.3D-9	1.3	5.0	2600	$\geq 11$	$\leq 70$	0.07	1000	250	2.0	-40 ~ 175
SCL1.5D-9	1.5	5.0	2600	$\geq 11$	$\leq 70$	0.07	1000	250	2.0	-40 ~ 175
SCL2D-9	2	5.0	2700	$\geq 11$	$\leq 70$	0.08	1000	250	2.0	-40 ~ 175
SCL2.2D-9	2.2	5.0	2700	$\geq 11$	$\leq 70$	0.08	1000	250	2.0	-40 ~ 175
SCL2.5D-9	2.5	5.0	2700	$\geq 11$	$\leq 70$	0.08	1000	250	2.0	-40 ~ 175
SCL3D-9	3	5.0	2800	$\geq 11$	$\leq 70$	0.08	1000	250	2.0	-40 ~ 175
SCL4D-9	4	4.0	2800	$\geq 11$	$\leq 70$	0.12	1000	250	2.0	-40 ~ 175
SCL4.7D-9	4.7	4.0	2800	$\geq 11$	$\leq 70$	0.13	1000	250	2.0	-40 ~ 175
SCL5D-9	5	4.0	2900	$\geq 11$	$\leq 70$	0.13	1000	250	2.0	-40 ~ 175
SCL6D-9	6	4.0	2900	$\geq 11$	$\leq 70$	0.13	1000	250	2.0	-40 ~ 175
SCL6.8D-9	6.8	3.0	2900	$\geq 11$	$\leq 70$	0.21	1000	250	2.0	-40 ~ 175
SCL7D-9	7	3.0	2900	$\geq 11$	$\leq 70$	0.21	1000	250	2.0	-40 ~ 175
SCL8D-9	8	3.0	2900	$\geq 11$	$\leq 70$	0.22	1000	250	2.0	-40 ~ 175
SCL10D-9	10	3.0	2965	$\geq 11$	$\leq 70$	0.23	1000	250	2.0	-40 ~ 175
SCL12D-9	12	3.0	2965	$\geq 11$	$\leq 70$	0.24	1000	250	2.0	-40 ~ 175
SCL13D-9	13	3.0	2965	$\geq 11$	$\leq 70$	0.25	1000	250	2.0	-40 ~ 175
SCL15D-9	15	2.5	3065	$\geq 11$	$\leq 70$	0.32	1000	250	2.0	-40 ~ 175
SCL16D-9	16	2.5	3065	$\geq 11$	$\leq 70$	0.32	1000	250	2.0	-40 ~ 175
SCL18D-9	18	2.0	3065	$\geq 11$	$\leq 70$	0.46	1000	250	2.0	-40 ~ 175
SCL20D-9	20	2.0	3065	$\geq 11$	$\leq 70$	0.47	1000	250	2.0	-40 ~ 175
SCL22D-9	22	2.0	3065	$\geq 11$	$\leq 70$	0.48	1000	250	2.0	-40 ~ 175
SCL25D-9	25	2.0	3165	$\geq 11$	$\leq 70$	0.49	1000	250	2.0	-40 ~ 175
SCL30D-9	30	2.0	3165	$\geq 11$	$\leq 70$	0.52	1000	250	2.0	-40 ~ 175
SCL33D-9	33	2.0	3165	$\geq 11$	$\leq 70$	0.53	1000	250	2.0	-40 ~ 175
SCL40D-9	40	2.0	3165	$\geq 11$	$\leq 70$	0.56	1000	250	2.0	-40 ~ 175
SCL47D-9	47	2.0	3265	$\geq 11$	$\leq 70$	0.56	1000	250	2.0	-40 ~ 175
SCL50D-9	50	2.0	3265	$\geq 11$	$\leq 70$	0.57	1000	250	2.0	-40 ~ 175
SCL60D-9	60	1.0	3265	$\geq 11$	$\leq 70$	1.64	1000	250	2.0	-40 ~ 175
SCL80D-9	80	1.0	3450	$\geq 11$	$\leq 70$	1.66	1000	250	2.0	-40 ~ 175
SCL100D-9	100	1.0	3450	$\geq 11$	$\leq 70$	1.79	1000	250	2.0	-40 ~ 175
SCL120D-9	120	1.0	3450	$\geq 11$	$\leq 70$	1.85	1000	250	2.0	-40 ~ 175
SCL220D-9	220	1.0	3620	$\geq 11$	$\leq 70$	2.07	1000	250	2.0	-40 ~ 175

### Max. Current Derating Curve

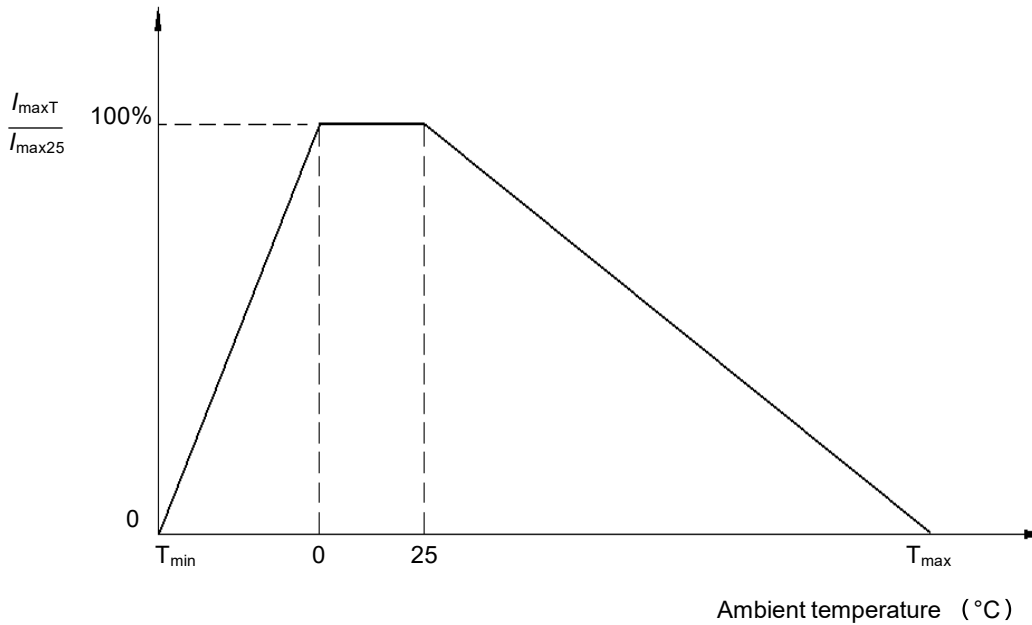

$T_{max}$ : Maximum Operating Temperature (°C)

$T_{min}$ : Minimum Operating Temperature (°C)

$$T_{min} < T < 0: I_{maxT} = \left[ 1 - \frac{0-T}{0-T_{min}} \right] \times I_{max25}$$

$$25 < T < T_{max}: I_{maxT} = \left[ 1 - \frac{T-25}{T_{max}-25} \right] \times I_{max25}$$

For Example:

$T_{min}$ : -40 °C      $T_{max}$ : 175 °C

Ambient Temperature (T) = -10 °C

$$I_{maxT} = \left[ 1 - \frac{0-T}{0-T_{min}} \right] \times I_{max25}$$



$$= 75\% I_{max25}$$

Ambient Temperature (T) = 60 °C



$$I_{maxT} = \left[ 1 - \frac{T-25}{T_{max}-25} \right] \times I_{max25}$$

$$= 77\% I_{max25}$$

### R-T Characteristic Curves (For reference only)

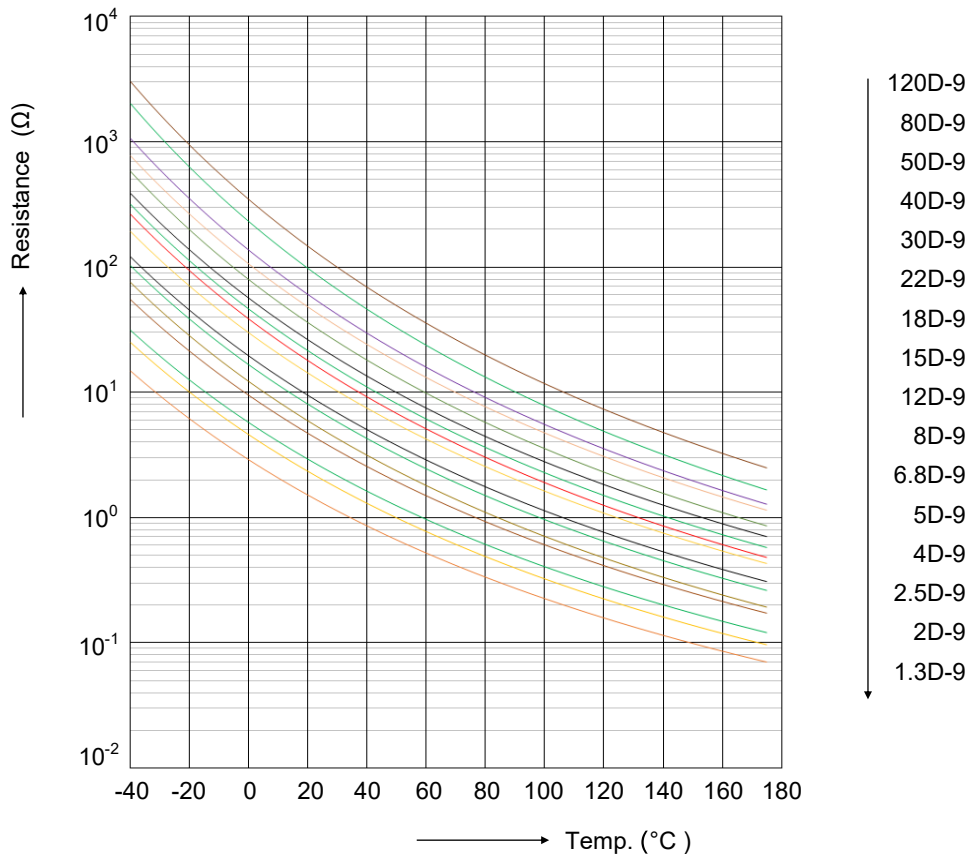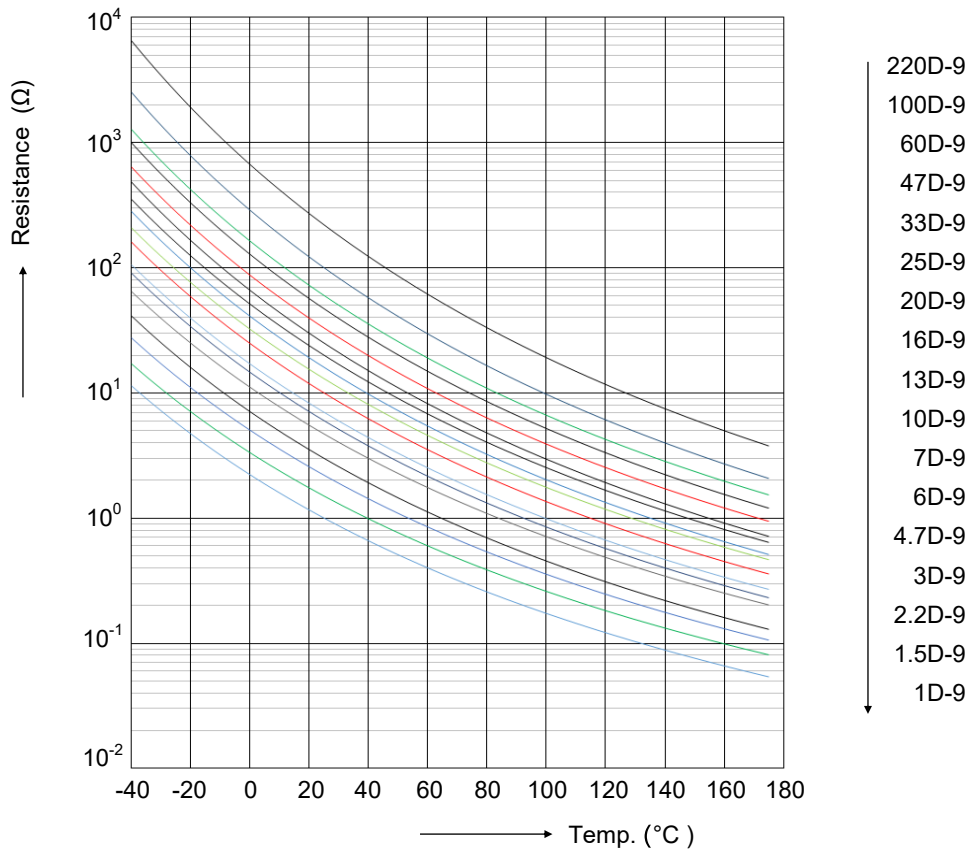


### Resistance & Current Curves (For reference only)

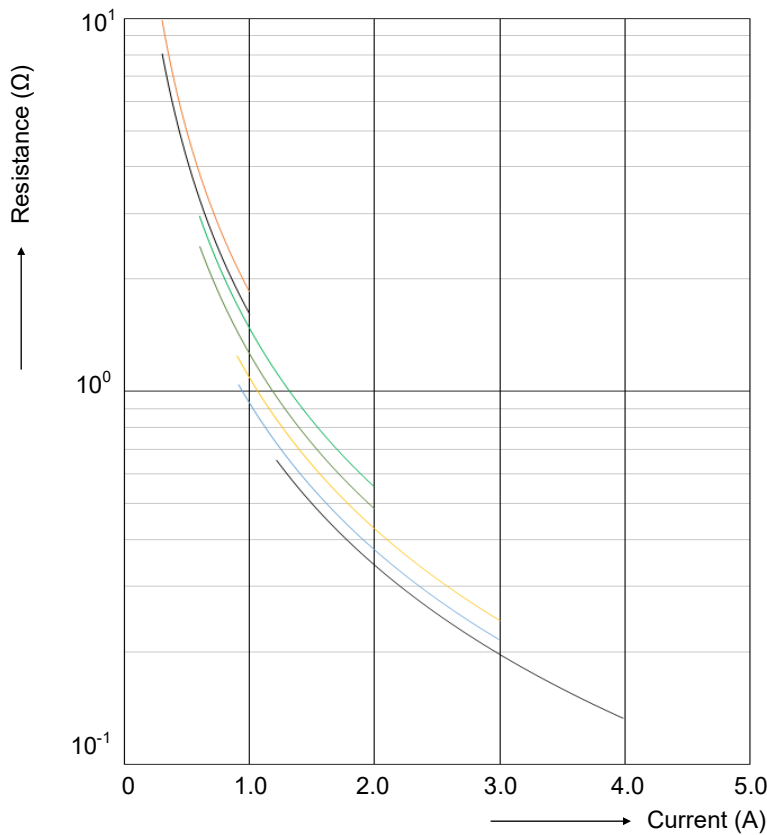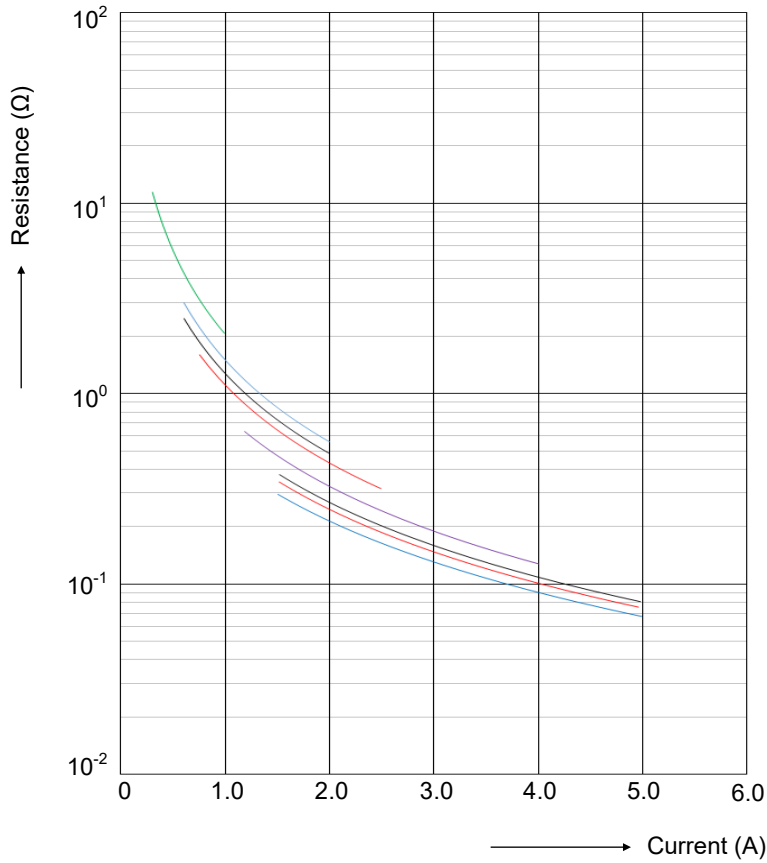




### Resistance & Current Curves (For reference only)

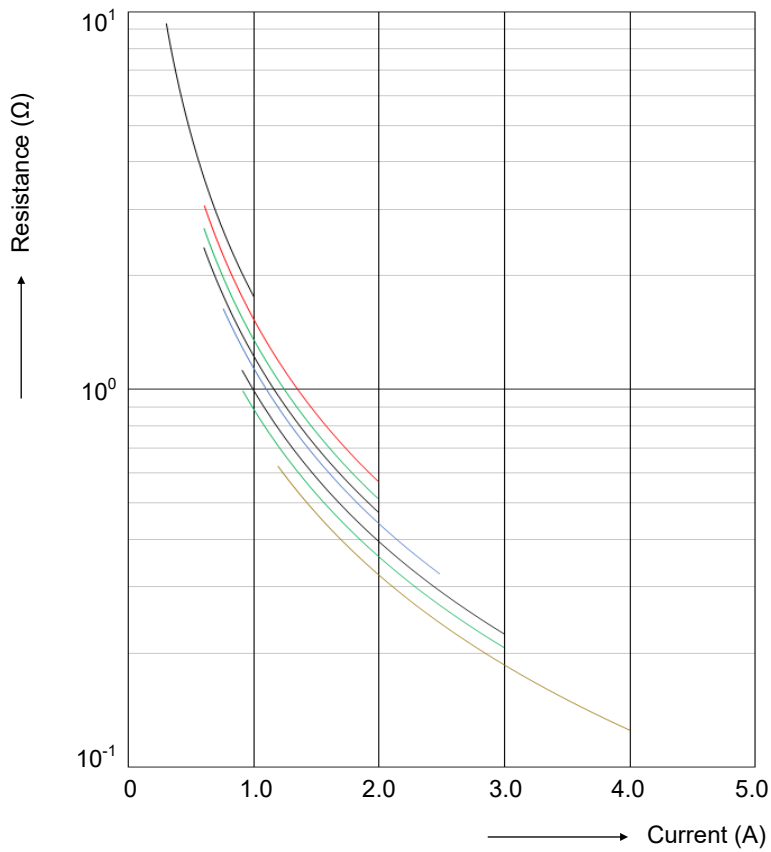

- 100D-9
- 50D-9
- 30D-9
- 20D-9
- 16D-9
- 10D-9
- 7D-9
- 5D-9

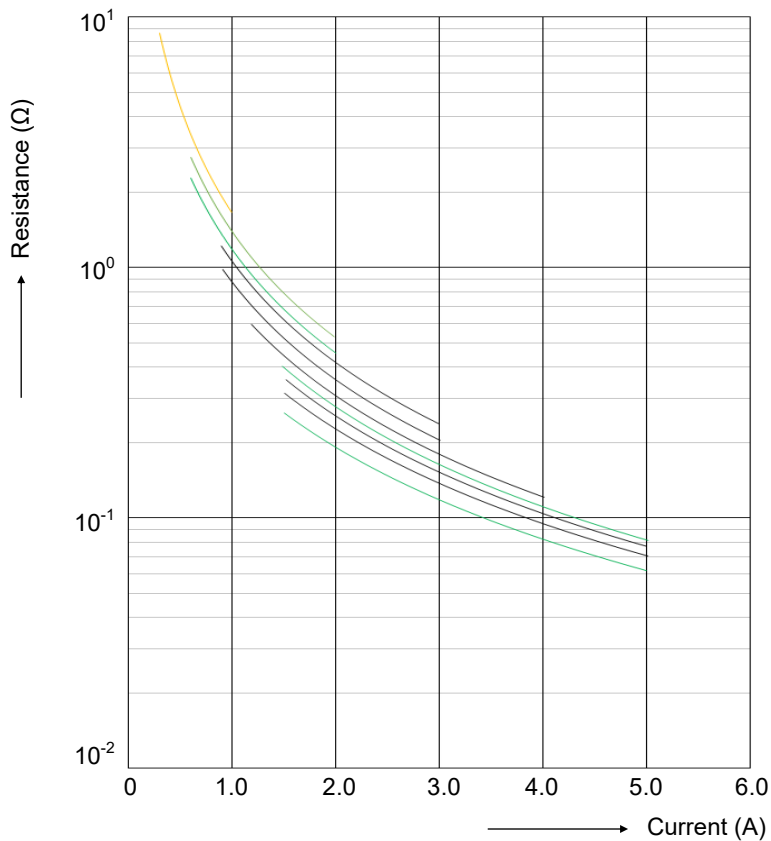

- 80D-9
- 33D-9
- 18D-9
- 12D-9
- 6.8D-9
- 4D-9
- 3D-9
- 2.2D-9
- 1.5D-9
- 1D-9


NTC

NTC

### Soldering Parameters

#### 1. Wave Soldering Parameters

The wave soldering parameters are for reference only. When NTC is for practice use, some related validation is recommended.

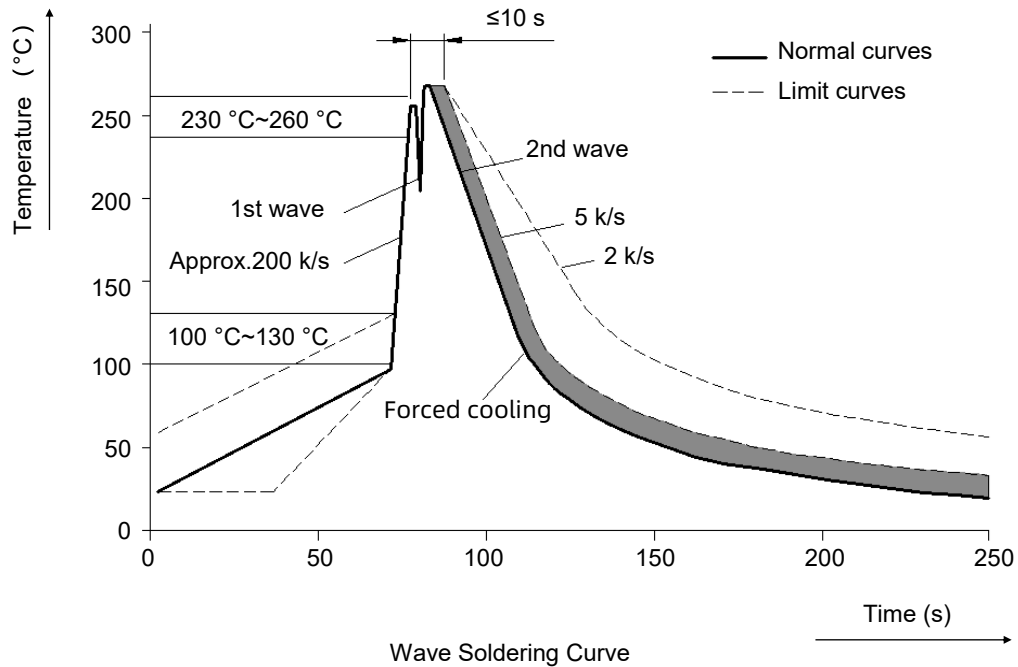

#### 2. Recommended Hand-Solder Parameters

For hand soldering, please notice the solder tip temperature and the soldering time, recommended as follows:


Items	Conditions
Temp. of Solder Head	360 °C (max.)
Soldering Time	3 seconds (max.)
Distance from Thermistor	2 mm (min.)

### Packaging

#### 1. Bulk Packaging (Code: BN0)


Item	PE Bag	Inner Box	Carton
Dimensions (mm)	200 × 210	245 × 165 × 67	365 × 265 × 245
Quantity (PCS)	500	1000	6000

Notes: Packaging dimensions and quantity are for reference only.

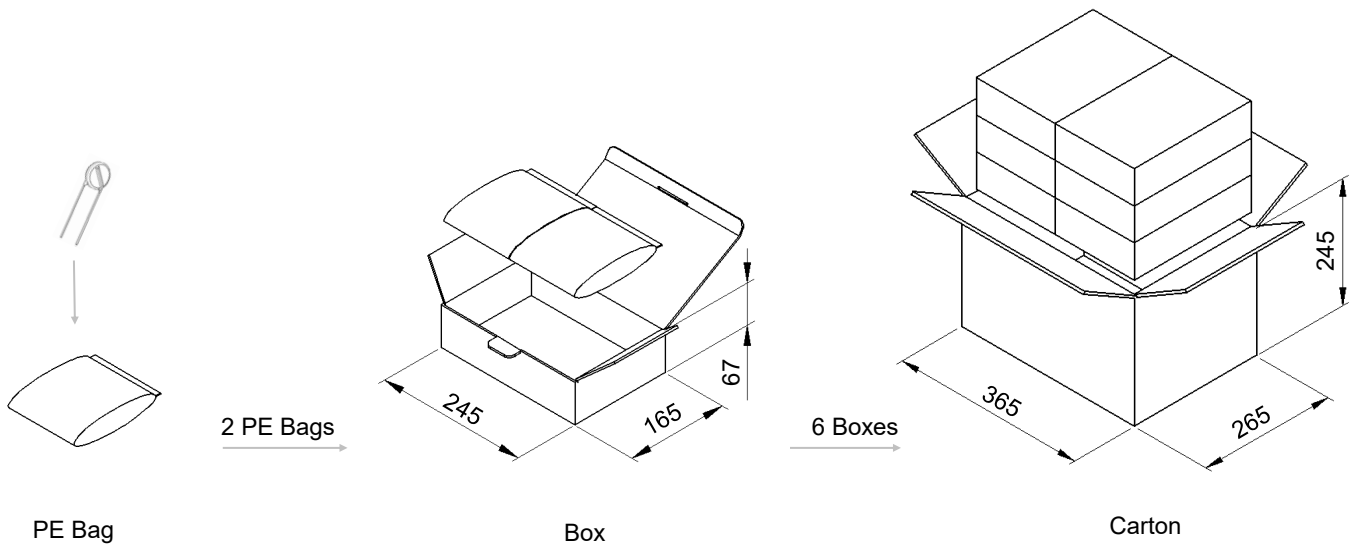

#### 2. Ammo Packing (Code: A01)


##### 2.1 Dimensions and Quantity

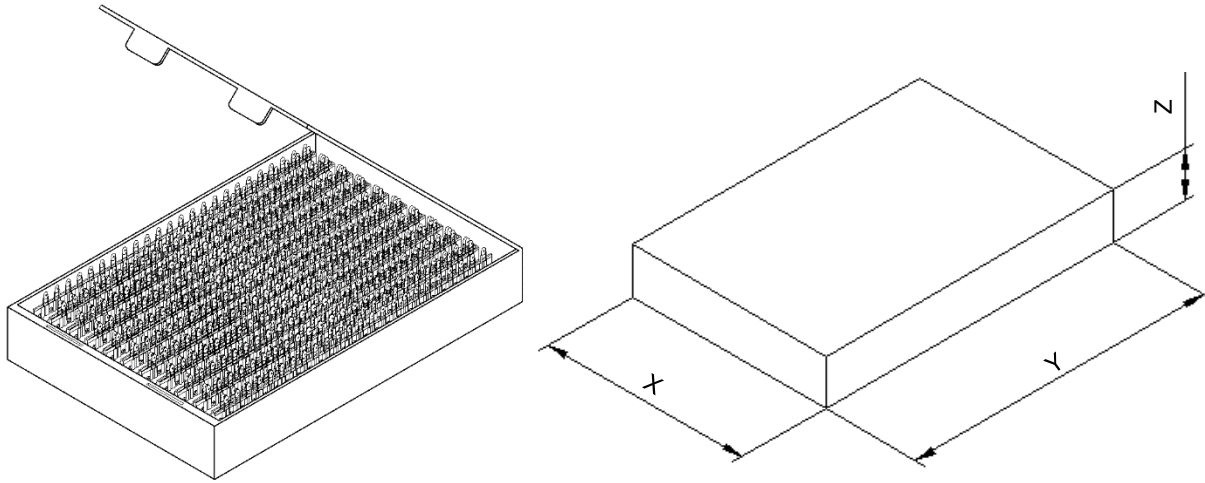

Dimensions (mm)			Quantity ( PCS / Carton)
X	Y	Z	
235 Max.	345 Max.	55 Max.	1000

Notes: Packaging dimensions and quantity are for reference only.

##### 2.2 Taping Dimensions ( mm )

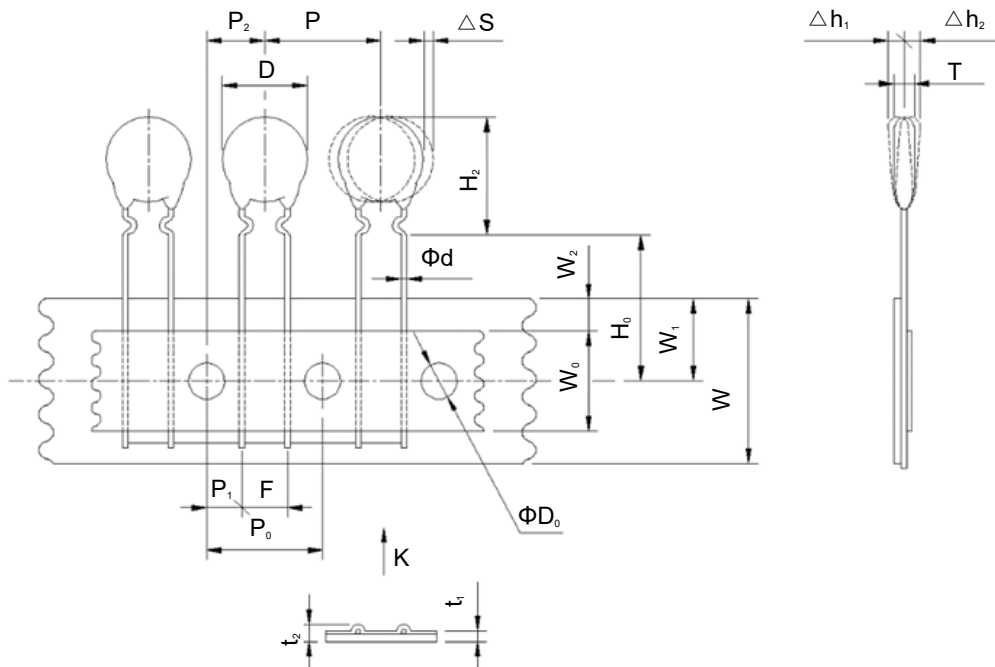

P	P <sub>0</sub>	F	P <sub>2</sub>	P <sub>1</sub>	D	ΔS	W	W <sub>1</sub>	H <sub>0</sub>
(12.7)	12.7 ± 0.3	5.0 ± 0.5	6.35 ± 1.3	3.85 ± 0.8	11.0 Max.	± 1.5	18.0 ± 1.0	9.0 ± 1.0	16.0 ± 1.0
H <sub>2</sub>	ΦD <sub>0</sub>	Φd	t <sub>1</sub>	t <sub>2</sub>	Δh <sub>1</sub> , Δh <sub>2</sub>	W <sub>0</sub>	W <sub>2</sub>	T	
16.0 Max.	4.0 ± 0.3	0.8 ± 0.05	0.6 ± 0.3	2.0 Max.	1.5 Max.	10.0 Min.	4.0 Max.	5.5Max.	



# ATTENTION

## Usage

1. Thermistor must be operated within the specified ambient temperature.
2. Do not clean the thermistor with strong polar solvent such as ketone, esters, benzene, halogenated hydrocarbon, to avoid damaging the encapsulating layer.
1. Please do not apply severe vibration, shock or pressure to thermistor, to avoid surface resin or element cracking.
2. Please fix lead wires when bending or cutting. the distance between the bending point and the sealing of thermistor shall be greater than 2 mm.

## Replacement

1. If thermistor is visually damaged, please replace it.
2. Thermistor is a non-repairable product. for safety sake, please use equivalent thermistor for replacement

## Storage

1. Storage thermistor only in original packaging. do not open the package before storage.
2. Storage temperature range: -25 to 45 °C.
3. Relative humidity : ≤75% RH.
4. Keep away from corrosive gas and direct sunlight.
5. Period of storage: ≤1 Year.

## Installation

Do not take violent action such as knocking when assembling to avoid mechanical damage.