


## Organic Thermal Link DF Series

## 15A Series

### Key Features





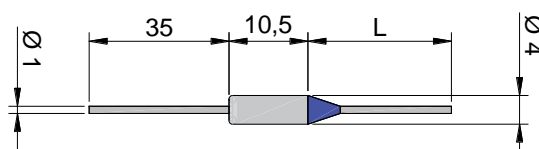

- Metal case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant
- Bulk or Tape & Reel packing

### Dimensions



L = 25.4±1 (DF\_S) or 35±1 (DF\_S-L)

### Specification

Model	T <sub>f</sub>	T <sub>h</sub>	T <sub>m</sub>	I <sub>r</sub>	U <sub>r</sub>						
	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	VDE	PSE	CCC	RoHS REACH
DF50S	50	30	130	15	AC 250	○	○	○	●	○	●
DF57S	57	37	130	15	AC 250	○	○	○	●	○	●
DF66S	66	42	110	15	AC 250	●	●	●	●	●	●
DF72S	72	50	115	15	AC 250	●	●	●	●	●	●
DF77S	77	55	120	15	AC 250	●	●	●	●	●	●
DF84S	84	60	125	15	AC 250	●	●	●	●	●	●
DF91S	91	67	135	15	AC 250	●	●	●	●	●	●
DF98S	98	76	140	15	AC 250	●	●	●	●	●	●
DF100S	100	78	135	15	AC 250	●	●	●	●	●	●
DF104S	104	80	150	15	AC 250	●	●	●	●	●	●
DF110S	110	88	140	15	AC 250	●	●	●	●	●	●
DF115S	115	95	170	15	AC 250	○	○	○	●	○	●
DF119S	119	95	170	15	AC 250	●	●	●	●	●	●
DF121S	121	95	170	15	AC 250	○	○	○	●	○	●
DF128S	128	106	155	15	AC 250	●	●	●	●	●	●
DF132S	132	110	155	15	AC 250	○	○	○	●	○	●
DF139S	139	117	170	15	AC 250	●	●	○	●	○	●
DF141S	141	117	171	15	AC 250	●	●	●	●	●	●
DF144S	144	120	250	15	AC 250	●	●	●	●	●	●
DF152S	152	128	250	15	AC 250	●	●	●	●	●	●
DF167S	167	142	250	15	AC 250	●	●	●	●	○	●
DF169S	169	145	300	15	AC 250	○	○	○	●	○	●
DF170S	170	146	300	15	AC 250	●	●	●	●	●	●
DF179S	179	155	300	15	AC 250	○	○	○	●	○	●
DF184S	184	160	300	15	AC 250	●	●	●	●	●	●
DF192S	192	162	290	15	AC 250	●	●	●	●	●	●
DF216S	216	191	241	15	AC 250	○	○	●	●	●	●
DF222S	222	195	300	15	AC 250	○	○	○	●	○	●
DF228S	228	193	300	15	AC 250	●	●	●	●	●	●
DF240S	240	200	290	15	AC 250	●	●	●	●	●	●
DF260S	260	220	350	15	AC 250	○	○	○	●	○	●
DF280S	280	230	350	15	AC 250	○	○	○	●	○	●