


FRU Series

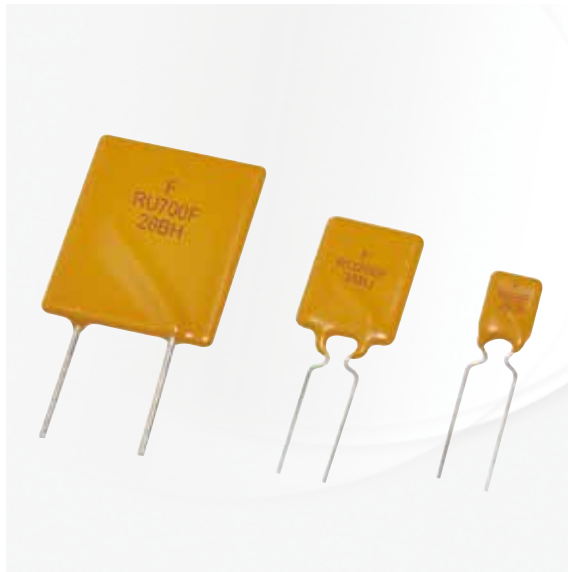

Application

Wide variety of electronic equipment

Product Features

Low resistance, High hold current, Solid state

Radial-leaded product ideal for up to 30V_{DC}



Operation Current

0.90A~9.00A

Maximum Voltage

30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50004084)



SVHC Compliant

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ohms	Ohms
FRU090-30F	0.90	1.80	5.9	100	30	0.6	0.070	0.220
FRU110-30F	1.10	2.20	6.6	100	30	0.7	0.050	0.170
FRU135-30F	1.35	2.70	7.3	100	30	0.8	0.040	0.130
FRU160-30F	1.60	3.20	8.0	100	30	0.9	0.030	0.110
FRU185-30F	1.85	3.70	8.7	100	30	1.0	0.030	0.090
FRU250-30F	2.50	5.00	10.3	100	30	1.2	0.020	0.070
FRU300-30F	3.00	6.00	10.8	100	30	2.0	0.020	0.080
FRU400-30F	4.00	8.00	12.7	100	30	2.5	0.010	0.050
FRU500-30F	5.00	10.00	14.5	100	30	3.0	0.010	0.050
FRU600-30F	6.00	12.00	16.0	100	30	3.5	0.005	0.040
FRU700-30F	7.00	14.00	17.5	100	30	3.8	0.005	0.030
FRU800-30F	8.00	16.00	18.8	100	30	4.0	0.005	0.020
FRU900-30F	9.00	18.00	20.0	100	30	4.2	0.005	0.020


Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	76%	70%	61%	50%


IV - Radial Leaded PPTC

Typical Time-To-Trip at 23°C

A = FRU090-30F	H = FRU400-30F
B = FRU110-30F	I = FRU500-30F
C = FRU135-30F	J = FRU600-30F
D = FRU160-30F	K = FRU700-30F
E = FRU185-30F	L = FRU800-30F
F = FRU250-30F	M = FRU900-30F
G = FRU300-30F	

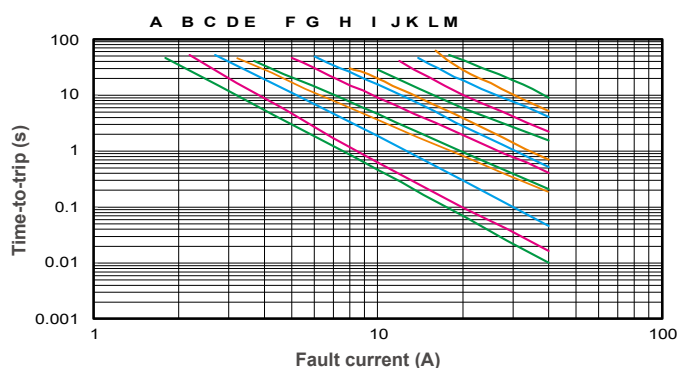


FRU Product Dimensions (mm)

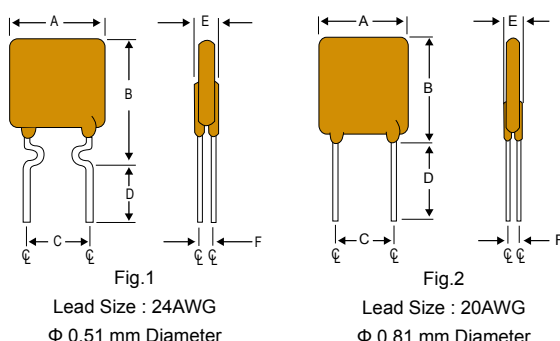


Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRU090-30F	1	7.4	12.2	5.1	7.6	3.0	0.9
FRU110-30F	1	7.4	14.2	5.1	7.6	3.0	0.9
FRU135-30F	1	8.9	13.5	5.1	7.6	3.0	0.9
FRU160-30F	1	8.9	15.2	5.1	7.6	3.0	0.9
FRU185-30F	1	10.2	15.7	5.1	7.6	3.0	0.9
FRU250-30F	1	11.4	18.3	5.1	7.6	3.0	0.9
FRU300-30F	2	11.4	17.3	5.1	7.6	3.0	1.2
FRU400-30F	2	14.0	20.1	5.1	7.6	3.0	1.2
FRU500-30F	2	14.0	24.9	10.2	7.6	3.0	1.2
FRU600-30F	2	16.5	24.9	10.2	7.6	3.0	1.2
FRU700-30F	2	19.1	26.7	10.2	7.6	3.0	1.2
FRU800-30F	2	21.6	29.2	10.2	7.6	3.0	1.2
FRU900-30F	2	24.1	29.7	10.2	7.6	3.0	1.2

Part Numbering System

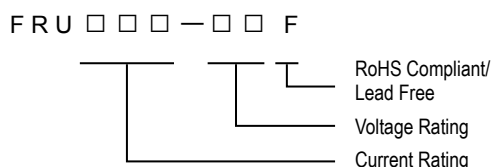

Part Marking System

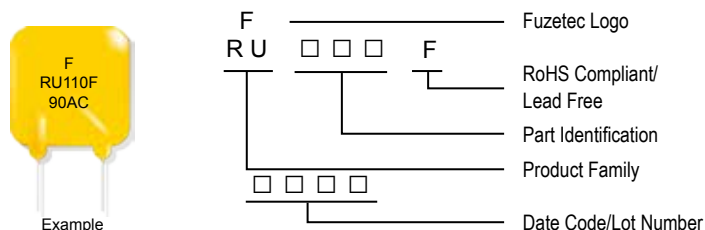

Package Information

Part Number	Standard Package
FRU090-30F~FRU110-30F	500 Pcs/Bag, 3.0K Reel/Tape
FRU135-30F~FRU250-30F	300 Pcs/Bag, 3.0K Reel/Tape
FRU300-30F~FRU400-30F	200 Pcs/Bag, 1.5K Reel/Tape
FRU500-30F	200 Pcs/Bag, 1.0K Reel/Tape
FRU600-30F~FRU900-30F	100 Pcs/Bag

Physical specifications

Lead material	FRU090-30F~FRU250-30F Tin plated copper clad steel, 24 AWG. FRU300-30F~FRU900-30F Tin plated copper, 20 AWG.
Soldering characteristics	MIL-STD-202, Method 208E.
Insulating coating	Flame retardant epoxy, meets UL-94V-0 requirement.

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.