

FSMD0603 Series



Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.01A~0.25A

Maximum Voltage

9V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50090556)



SVHC Compliant

Electrical Characteristics (23°C)


Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
						Current	Time	R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	V _{MAX} , V _{DC}	I _{MAX} , A	P _d , W	A	Sec	Ohms	Ohms
FSMD001-0603-R	0.01	0.03	60	40	0.5	0.20	1.00	15.00	100.00
FSMD002-0603-R	0.02	0.06	60	40	0.5	0.20	1.00	12.00	70.00
FSMD003-0603-R	0.03	0.09	30	40	0.5	0.20	1.00	6.00	50.00
FSMD004-0603-R	0.04	0.12	24	40	0.5	0.20	1.00	4.00	40.00
FSMD005-0603-R	0.05	0.15	15	40	0.5	0.50	0.10	3.80	30.00
FSMD008-0603-R	0.08	0.20	15	40	0.5	0.60	0.10	2.80	14.00
FSMD010-0603-R	0.10	0.25	15	40	0.5	0.70	0.10	0.90	8.00
FSMD012-0603-R	0.12	0.30	9	40	0.5	0.80	0.10	1.10	5.80
FSMD016-0603-R	0.16	0.40	9	40	0.5	1.00	0.10	1.00	4.20
FSMD020-0603-R	0.20	0.45	9	40	0.5	2.00	0.10	0.55	3.50
FSMD025-0603-R	0.25	0.55	9	40	0.5	8.00	0.08	0.50	3.00

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	157%	137%	118%	100%	89%	80%	70%	60%	51%	37%


Typical Time-To-Trip at 23°C

- A = FSMD001-0603-R
- B = FSMD002-0603-R
- C = FSMD003-0603-R
- D = FSMD004-0603-R
- E = FSMD005-0603-R
- F = FSMD008-0603-R
- G = FSMD010-0603-R
- H = FSMD012-0603-R
- I = FSMD016-0603-R
- J = FSMD020-0603-R
- K = FSMD025-0603-R

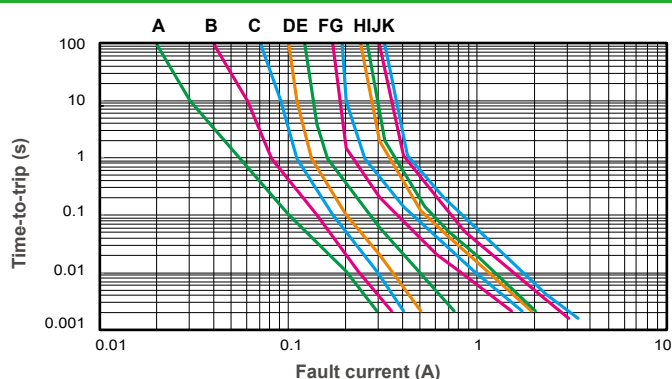

NOTE : All Specifications subject to change without notice.

FSMD0603 Product Dimensions (mm)

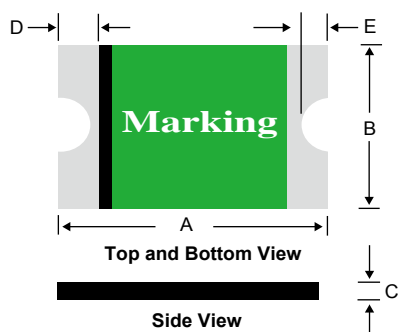

***For Reflow Soldering Profile information,
please refer to P.69 “ IX APPENDIX - SMD
PRODUCT SOLDER REFLOW
RECOMMENDATIONS ”**


Part Number	A		B		C		D		E	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSMD001-0603-R	1.40	1.80	0.45	1.00	0.35	0.85	0.10	0.50	0.08	0.40
FSMD002-0603-R	1.40	1.80	0.45	1.00	0.35	0.85	0.10	0.50	0.08	0.40
FSMD003-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD004-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD005-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD008-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD010-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD012-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD016-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD020-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD025-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40

Part Numbering System


FSMD □ □ □ - 0603 - R



Part Marking System



Example



Part Identification

X = FSMD001-0603-R
Y = FSMD002-0603-R
Z = FSMD003-0603-R
A = FSMD004-0603-R
B = FSMD005-0603-R
C = FSMD008-0603-R

D = FSMD010-0603-R
E = FSMD012-0603-R
F = FSMD016-0603-R
G = FSMD020-0603-R
V = FSMD025-0603-R

Package Information

Part Number	Standard Package
FSMD001-0603-R~FSMD025-0603-R	4.0K Reel/Tape

Physical specifications

Termination pad materials	Pure Tin
Soldering characteristics	Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.