


### FSMD2920 Series

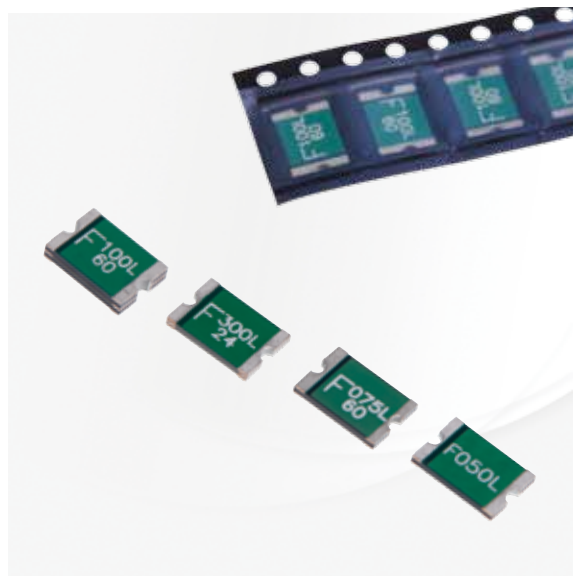

#### Application

All high-density boards

#### Product Features

2920 Dimension, Surface mountable, Solid state, Faster time to trip than standard SMD devices.



#### Operation Current

0.30A~5.00A

#### Maximum Voltage

6V~60V<sub>DC</sub>



#### Temperature Range

-40°C to 85°C

#### Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50090556)



SVHC Compliant

### Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
						Current	Time	R <sub>MIN</sub>	R <sub>1MAX</sub>
	I <sub>H</sub> , A	I <sub>T</sub> , A	V <sub>MAX</sub> , V <sub>DC</sub>	I <sub>MAX</sub> , A	Pd, W	A	Sec	Ohms	Ohms
FSMD030-2920-R	0.30	0.60	60	100	1.5	1.5	3.0	1.000	4.800
FSMD050-2920-R	0.50	1.00	60	100	1.5	2.5	4.0	0.300	1.400
FSMD075-2920-R	0.75	1.50	33	100	1.5	8.0	0.3	0.180	1.000
FSMD075-60-2920-R	0.75	1.50	60	100	1.5	8.0	0.3	0.180	1.000
FSMD100-2920-R	1.10	2.20	33	100	1.5	8.0	0.5	0.090	0.410
FSMD110-60-2920R	1.10	2.20	60	100	1.5	8.0	0.5	0.090	0.410
FSMD125-2920-R	1.25	2.50	33	100	1.5	8.0	2.0	0.050	0.250
FSMD150-2920-R	1.50	3.00	33	100	1.5	8.0	2.0	0.050	0.230
FSMD185-2920-R	1.85	3.70	33	100	1.5	8.0	2.5	0.040	0.150
FSMD200-2920-R	2.00	4.00	16	100	1.5	8.0	5.0	0.035	0.120
FSMD200-24-2920-R	2.00	4.00	24	100	1.5	8.0	5.0	0.035	0.120
FSMD250-2920-R	2.50	5.00	16	100	1.5	8.0	16.0	0.025	0.085
FSMD260-2920-R	2.60	5.20	6	100	1.5	8.0	20.0	0.020	0.075
FSMD260-24-2920R	2.60	5.20	24	100	1.5	8.0	20.0	0.020	0.075
FSMD300-2920-R	3.00	5.20	6	100	1.5	8.0	25.0	0.010	0.048
FSMD300-15-2920R	3.00	5.20	15	100	1.5	8.0	20.0	0.010	0.048
FSMD300-24-2920R	3.00	5.20	24	100	1.5	8.0	20.0	0.010	0.048
FSMD330-2920R	3.30	5.50	24	100	1.5	8.0	20.0	0.010	0.048
FSMD400-16-2920R	4.00	8.00	16	100	1.5	20.0	4.0	0.010	0.040
FSMD500-16-2920R	5.00	10.00	16	100	1.5	20.0	5.0	0.005	0.025

### Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	85%	78%	70%	62%	50%

