


Thermal Link P-1A-F Series

1A Series

Key Features

- Ceramic case
- Non-resettable
- High accuracy of function temperature
- RoHS & REACH compliant

Dimensions

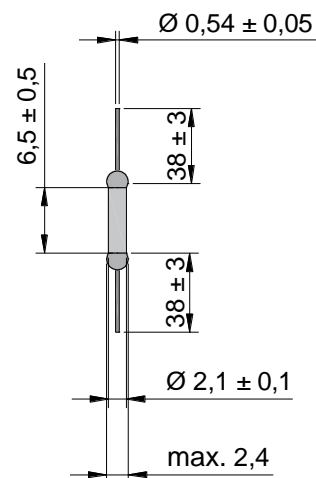

Specification

Model	T _f	Fusing Temp.	T _h	T _m	I _r	U _r	UL [®]	cUL [®]	DVE	PSE	CCC	KTL	RoHS REACH
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	UL recognized	cUL recognized	VDE	PSE	CCC	KTL	RoHS REACH
P1-1A-F	102	98±2	80	200	1	AC 250	●	●	●	●	●	●	●
P2-1A-F	115	112±3	99	200	1	AC 250	●	●	●	●	●	●	●
P3-1A-F	125	120±3	105	200	1	AC 250	●	●	●	●	●	●	●
P4-1A-F	130	126±2	107	200	1	AC 250	●	●	●	●	●	●	●
P5-1A-F	135	131±3	115	200	1	AC 250	●	●	●	●	●	●	●
P9-1A-F	138	135±2	118	200	1	AC 250	●	●	●	●	●	●	●
P12-1A-F	145	140±2	126	200	1	AC 250	●	●	●	●	●	●	●
P7-1A-F	150	145±3	128	200	1	AC 250	●	●	●	●	●	●	●