

SPD Module

Surge Protective Device Module


SM15MxxxA203



Description

SM15M230A203 series is specifically designed for Power supply for important equipment. The products facilitate surge immunity compliant with IEC 61643-11 Class I and Class II, protect equipment from lightning surge damage, SM15M230A203 Series is more space saving. It is also convenient for users to design and install.

Agency Approvals

Agency	Standards	No.
 us	UL1449	on request
Environment	RoHS & REACH	Compliant


Features

- High Reliability
- Class I and Class II SPD Module
- Thermally Protected MOV and GDT
- With Failure Indication and Remote Signal Contact
- Comply with IEC/EN 61643-11


Applications

- Telecom Equipment
- AC / DC Power Supply
- Uninterruptable Power Supply (UPS)
- Surge Protective Device (SPD)

Part Numbering System

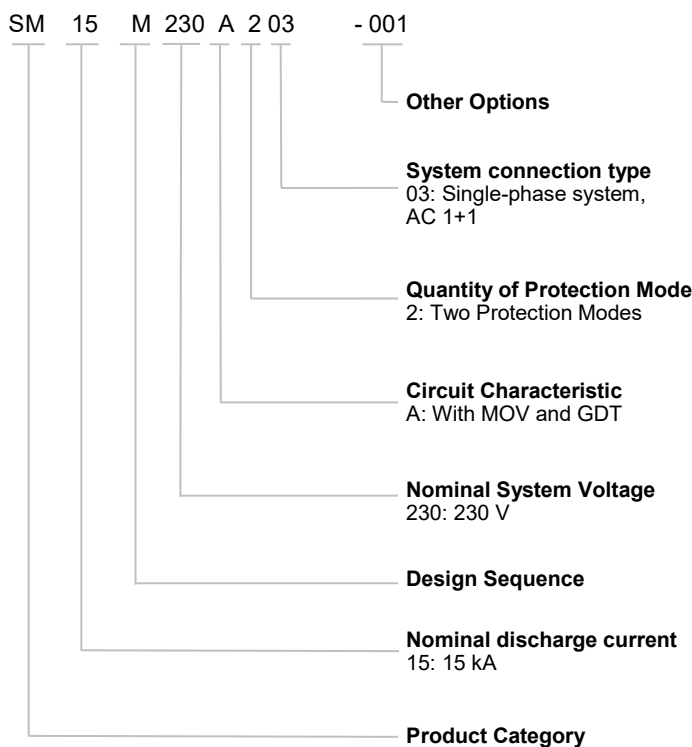



Schematics

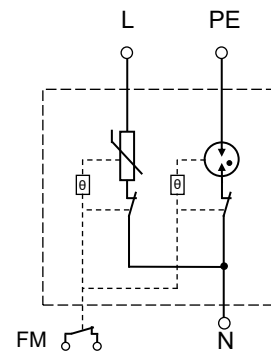

Glossary

Item	Description
U_p	Voltage Protection Level Maximum voltage to be expected at the SPD terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and wave shape. — (IEC 61643-11)
8/20 μ s	8/20 Current Impulse Current impulse with a nominal virtual front time of 8 μ s and a nominal time to half-value of 20 μ s. — (IEC 61643-11)
1.2/50 μ s	1.2/50 Voltage Impulse Voltage impulse with a nominal virtual front time of 1,2 μ s and a nominal time to half-value of 50 μ s. — (IEC 61643-11)
U_c	Maximum Continuous Operating Voltage Maximum r.m.s. voltage, which may be continuously applied to the SPD's mode of protection. — (IEC 61643-11)
I_{imp}	Impulse Discharge Current for Class I Test Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time. — (IEC 61643-11)
I_n	Nominal Discharge Current Crest value of the current through the SPD having a current waveshape of 8/20 μ s. — (IEC 61643-11)
I_{max}	Maximum Discharge Current Crest value of a current through the SPD having an 8/20 μ s waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n . — (IEC 61643-11)
Modes of Protection	Modes of Protection An intended current path, between terminals that contains protective components, e.g. line-to-line, line-to-earth, line-to-neutral, neutral-to-earth. — (IEC 61643-11)

Dimensions (mm)

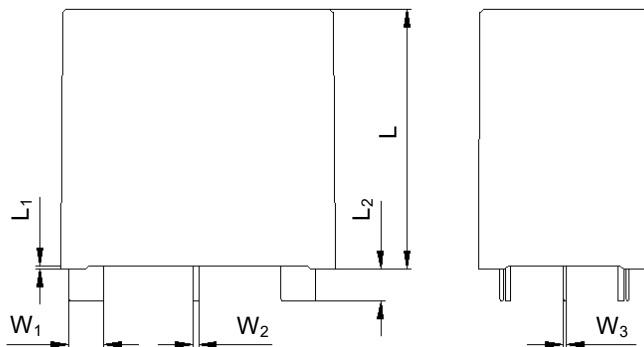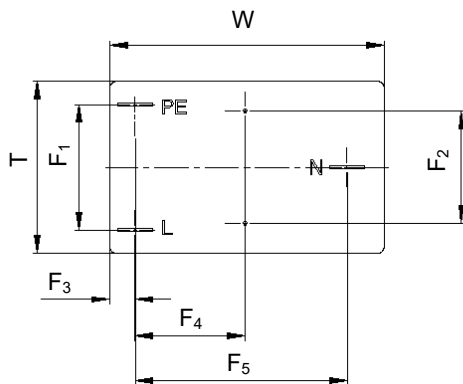


L	L ₁	L ₂	W
37.0±0.5	0.5±0.2	4.5±0.5	39.0±0.5
W ₁	W ₂	W ₃	T
5.0±0.3	0.8±0.1	0.5±0.1	24.5±0.5
F ₁	F ₂	F ₃	F ₄
17.9±0.5	16.0±0.5	3.6±0.5	15.6±0.5
F ₅			
30.1±0.5			

Specifications

Features	Specifications	
Model	SM15M230A203	SM15M277A203
Nominal system Voltage (U_n) VAC	230 VAC	277 VAC
Max. Continuous Operating Voltage (U_c) VAC	L-N: 320 VAC	L-N: 385 VAC
	N-G: 255 VAC	N-G: 255 VAC
Nominal Discharge Current (8/20 μ s) (I_n)	15 kA	15 kA
Maximum Discharge Current (8/20 μ s) (I_{max})	40 kA	40 kA
Voltage Protection Rating (U_p)	L - N: 1800 V	L - N: 1800 V
	N - PE: 1000 V	N - PE: 1000 V
Class I Test Impulse Current (I_{imp})	4 kA	4 kA
Protection Mode	1+1(L - N; N - PE)	
Failure Indication	Black (Normal) / Red (Fault)	
Alarm	Remote signal	
Max. Main-side Overcurrent Protection	125 A gL/gG	
According to Standard	IEC/EN 61643-11 Class I + Class II, UL 1449 Type 4CA	
Operational Temperature Range	(-40 ~ 85) °C	

Wave Soldering Parameters (Reference)

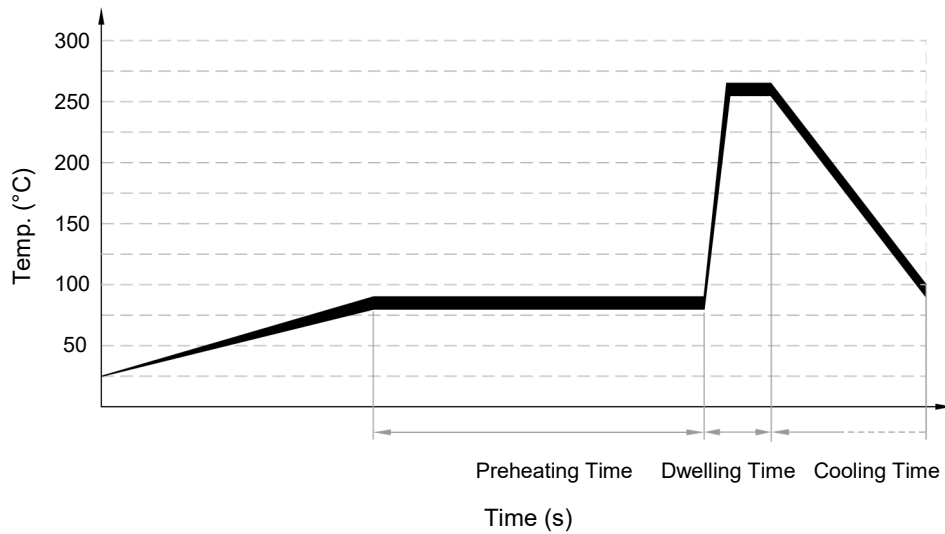

Item	Temp. (°C)	Time (s)
Preheating	80 to 90	60 to 150
Dwelling	250 to 260	2 to 4

Note:

The wave soldering parameters are for reference only. Before SPD module is for practice usage, relative validation is recommended.

Recommended Hand-Soldering Parameters

Item	Condition
Iron Temperature	350 °C (Max.)
Soldering Time	4 seconds (Max.)
Distance between Soldering Point and the Bottom of Product	2 mm (Min.)



ATTENTION

Usage

1. Frequency range is from 47 Hz to 63 Hz.
2. The voltage applied continuously to the SPD module must not exceed its maximum continuous operating voltage U_c .
3. When atmosphere press is from 80 kPa to 106 kPa, the related altitude shall be from 2000 meters to - 500 meters.
4. Do not touch the product body or pins directly when power is on, to avoid electric shock.

Replace

As SPD module is a non-repairable product, for safety sake, please use the same type of SPD module for replacement.

Storage

Do not store SPD module at high temperature, high humidity or corrosive gas environment, to avoid oxidation of the lead wires. Use them up within 1 year after receiving the goods.

Installation Position

Do not install SPD module to the place that may suffer severe vibration.