

α Therm



**PROVIDING A TOTAL SOLUTION FOR
HIGH STANDARD SAFETY CIRCUIT PROTECTION**

Alpha Therm GmbH: Ihr Offizieller Vertriebskanal für SETsafe/SETfuse

Die Alpha Therm GmbH mit Sitz in Plankstadt, Deutschland, ist stolz darauf, der offizielle Vertriebskanal für SETsafe/SETfuse in Deutschland, Europa und weltweit zu sein. Unsere langjährige Partnerschaft mit SETsafe/SETfuse basiert auf einem erfolgreichen und vertrauensvollen Geschäftsmodell.

Wir repräsentieren SETsafe/SETfuse auf internationalen Messen wie der Electronica, InterSolar, ees und vielen weiteren. Von kleinen Standardsicherungen bis hin zu komplexen, kundenspezifischen Automotive-Projekten – wir haben alles erfolgreich umgesetzt. Mit unserer umfassenden Lagerhaltung in Deutschland gewährleisten wir schnelle und zuverlässige Lieferungen.

Kontaktieren Sie uns! Unser kompetentes Team berät Sie ausführlich und findet die optimale Lösung für Ihre Anforderungen. Vertrauen Sie auf Alpha Therm GmbH und SETsafe/SETfuse – Ihre Partner für innovative Sicherheitslösungen.

Kontakt:

- Tel.: [+49] 6202 / 575688 - 0
- E-Mail: sales@alpha-therm.de

Alpha Therm GmbH: Your Official Distribution Channel for SETsafe/SETfuse

Alpha Therm GmbH, based in Plankstadt, Germany, is proud to be the official distribution channel for SETsafe/SETfuse in Germany, Europe, and worldwide. Our long-standing partnership with SETsafe/SETfuse is built on a successful and trustworthy business model.

We represent SETsafe/SETfuse at international trade fairs such as Electronica, InterSolar, ees, and many more. From small standard fuses to complex, customized automotive projects, we have successfully handled it all. With our extensive warehousing in Germany, we ensure fast and reliable deliveries.

Contact us today! Our competent team will provide you with detailed advice and find the optimal solution for your requirements. Trust Alpha Therm GmbH and SETsafe/SETfuse – your partners for innovative safety solutions.

Alpha Therm GmbH
Gewerbering 7
68723 Plankstadt
Germany


Tel: +49 (0) 6202 / 575688 - 0 Fax: -10
E-Mail: sales@alpha-therm.de
Web: www.alpha-therm.com

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series


Description



Thermal Fuse & MOV (TFMOV) is a thermally protected varistor that has all the characteristics of a thermally protected varistor (MOV). TFMOV has all the characteristics of a varistor (MOV) with thermal protection, and there are two types of deterioration: natural deterioration due to long-term operation and deterioration due to an abnormal surge. When a surge occurs, the leakage current of the degraded MOV continues to increase, causing the surface temperature of the MOV to continue to rise and the possibility of fire. At this time, the thermal cutoff (fusible alloy) in the TFMOV senses the abnormal temperature and operates (blows) to disconnect the MOV from the main circuit to protect the entire circuit, and the MOV itself will not continue to heat up and catch fire.

SETsafe | SETfuse Thermal Protection Varistors - Fusible Alloy TFMOV34SxxxL Series are mainly composed of Varistors (MOV), Thermal Cutoffs (Fusible Alloy) (ATCO), Flame Retardant Cases and Metal Components (Pins), Potting Materials. Vertical mounting structure; Nominal discharge current: (10 ~ 20) kA; Maximum continuous operating voltage: (30 ~ 420) VAC; Safety certificates: UL, cUL; RoHS, REACH compliant.


Schematics

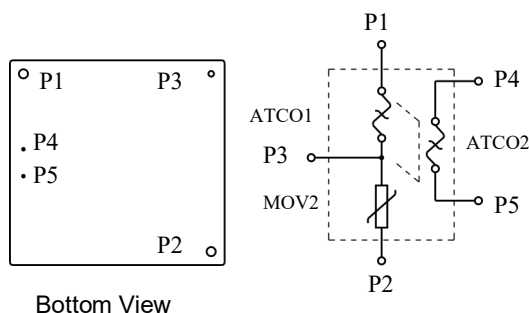

Bottom View

TFMOV(ATCO)

Structure

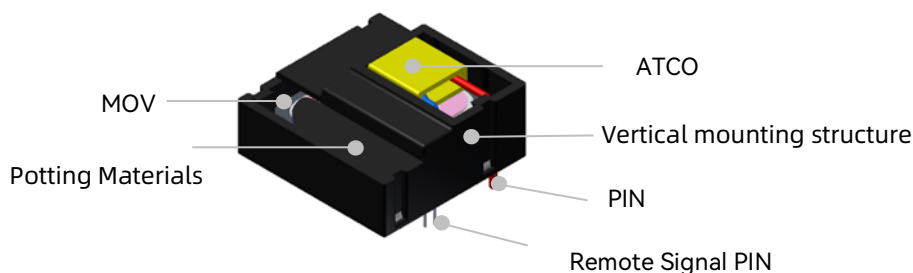

TFMOV(ATCO)

Features

- Thermal Protection, High Reliability
- Small Size
- Remote Signal Contact for Failure Indication (Optional)
- High Energy Capacity
- Epoxy Sealing Material, Flame-retardant to V0 (UL 94)
- Comply with UL 1449 / IEC 61643-11

Applications

- Telecom Equipment
- String Inverter in Photovoltaic System
- AC / DC Power Supply
- Uninterruptable Power Supply (UPS)
- Surge Protective Device (SPD)
- Electric Meter
- Power Distribution Unit (PDU)

TFMOV


Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Agency Approvals

Agency Symbol	Standards	The File No. and certification No. obtained by SETsafe SETfuse	Category
	UL 1449	E322662	Type 4CA
	CSA C22.2 NO. 269, CSA ECN 516	E322662	Type 4CA
Environment	RoHS & REACH	Compliant	

Part Numbering System

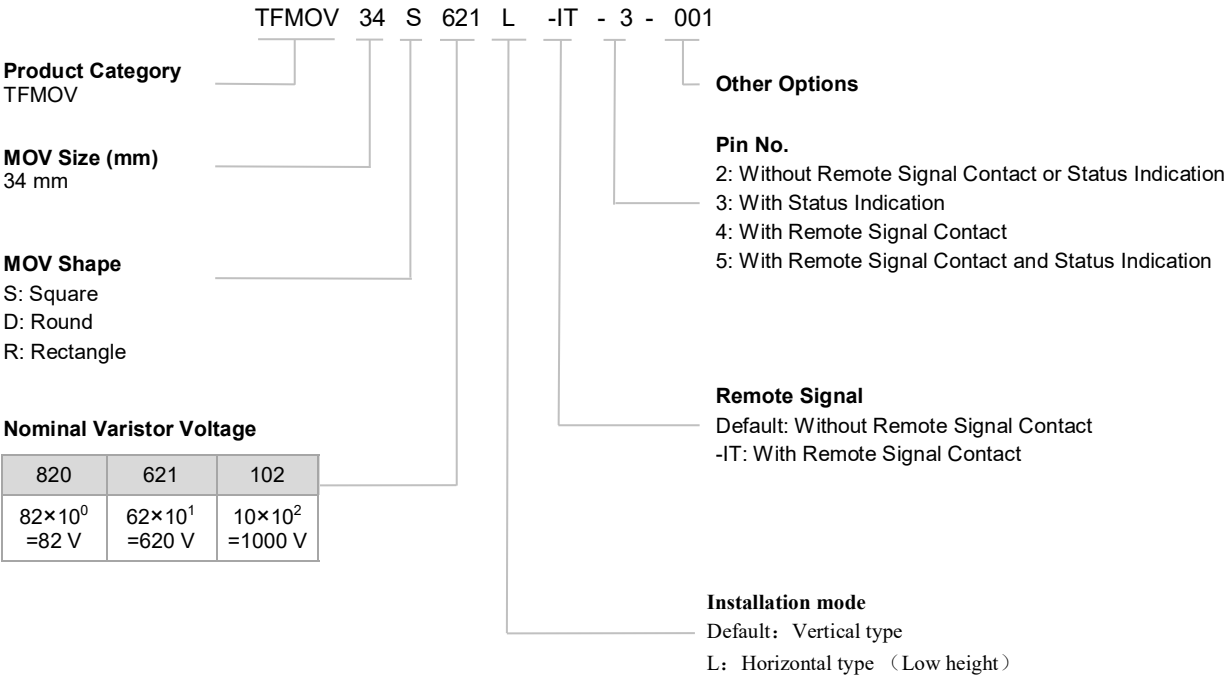


Reminder:
Part numbering system in the datasheet is only for selecting correct parameter and product features. Before placing order, please contact us for specifications and use the part number and product code in the specifications to place order to ensure the part is correct. Product code is the unique identification.


TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

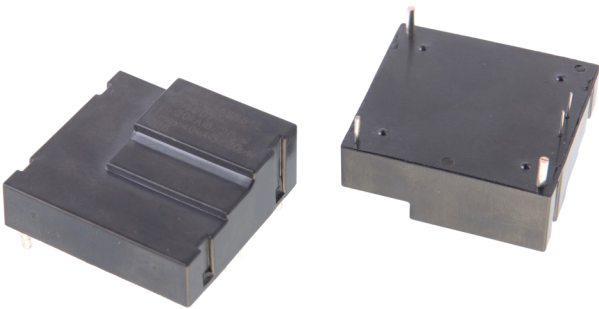


Note:
Pin P3 / P4 / P5 is Optional
Unit: mm

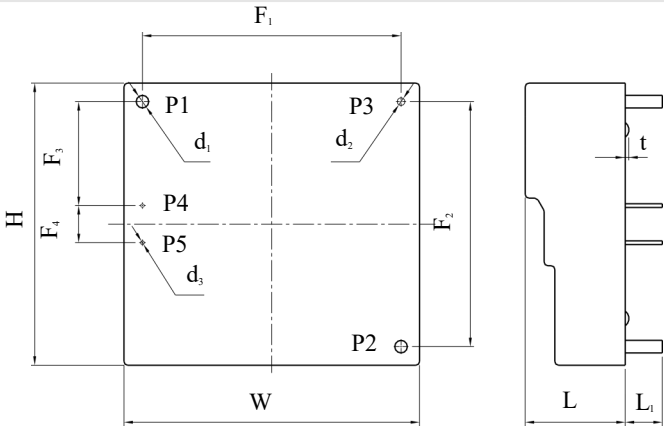

Nominal Varistor Voltage	L (±1.0)	L ₁ (±1.0)	W (±1.0)	H (±1.0)	d ₁ (-0.05,+0.15)	d ₂ (±0.05)	F ₁ (±0.5)	F ₂ (±0.5)	F ₃ (±0.5)	F ₄ (±0.5)	F ₅ (±0.5)	t (±0.1)
470 ~ 151	11.5	5.0	38.0	40.0	1.70	1.05	0.50	34.9	33.0	14.0	5.0	0.5
181 ~ 561	13.0	5.0	38.0	40.0	1.70	1.05	0.50	34.9	33.0	14.0	5.0	0.5
621 ~ 681	13.5	5.0	38.0	40.0	1.70	1.05	0.50	34.9	33.0	14.0	5.0	0.5

Packaging Information

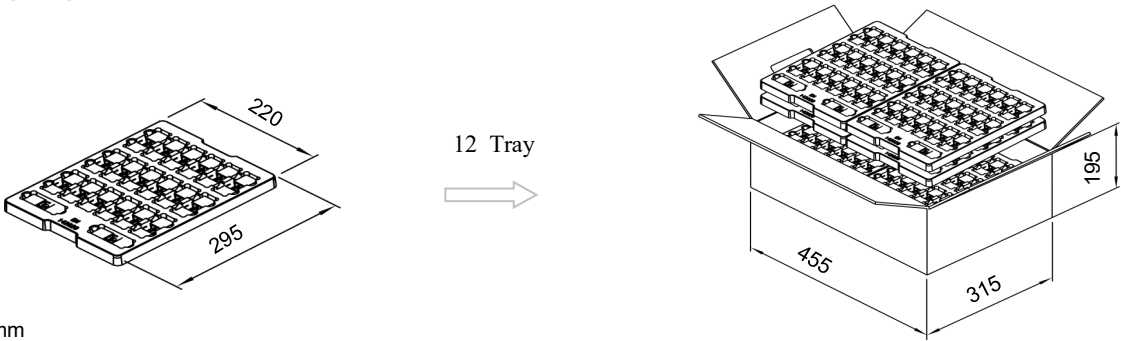

Unit: mm
Please contact us if you have special packaging requirements.

Item	Nominal Varistor Voltage	Tray	Carton
Dimensions (mm)	N/A	295 × 220	455 × 315 × 195
Quantity (PCS)	470 ~ 681	12	240

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Specifications

Model	Max. Continuous Operating Voltage		Varistor Voltage @1 mA DC		Clamping Voltage (Max.)		Nominal Dis-charge Current (8/20 μs)	Max. Dis-charge Current (8/20 μs)	Voltage Clamping Ratio ^a		Max. Energy (Joule)	Typical Capacitance (Reference)	Thermal Fuse
	U _c		Min.	Max.	V _C	I _P	I _n	I _{max}	R _{cl}	I _n	10/1000 μs	@1 kHz	UL 60691 E214712
	(VAC)	(VDC)	(V)		(V)	(A)	(kA)			(kA)	(J)	(pF)	
TFMOV34S470Lx	30	38	42	52	93	60	10	20	4.3	10	96	35000	VQ Series U _c : 690 VAC I _t : 25 A
TFMOV34S560Lx	35	45	50	62	110	60	10	20	3.8	10	115	29500	
TFMOV34S680Lx	40	56	61	75	135	60	10	20	3.8	10	136	24200	
TFMOV34S820Lx	50	65	74	90	135	300	15	30	3.2	15	156	17950	
TFMOV34S101Lx	60	85	90	110	165	300	15	30	3.2	15	195	15000	
TFMOV34S121Lx	75	100	108	132	200	300	15	30	3.2	15	235	12200	
TFMOV34S151Lx	95	125	135	165	250	300	20	40	3.2	20	296	10000	
TFMOV34S181Lx	115	150	162	198	300	300	20	40	2.3	20	350	8250	
TFMOV34S201Lx	130	170	185	225	340	300	20	40	2.3	20	400	6750	
TFMOV34S221Lx	140	180	198	242	360	300	20	40	2.3	20	450	6400	
TFMOV34S241Lx	150	200	216	264	395	300	20	40	2.3	20	480	5650	
TFMOV34S271Lx	175	225	243	297	455	300	20	40	2.3	20	540	5100	
TFMOV34S301Lx	190	250	270	330	500	300	20	40	2.3	20	600	4510	
TFMOV34S331Lx	210	275	297	363	550	300	20	40	2.3	20	656	4150	
TFMOV34S361Lx	230	300	324	396	595	300	20	40	2.3	20	745	3750	
TFMOV34S391Lx	250	320	351	429	650	300	20	40	2.3	20	830	3500	
TFMOV34S431Lx	275	350	387	473	710	300	20	40	2.3	20	920	2950	
TFMOV34S471Lx	300	385	423	517	775	300	20	40	2.3	20	1000	2880	
TFMOV34S511Lx	320	415	459	561	845	300	20	40	2.3	20	1060	2650	
TFMOV34S561Lx	350	460	504	616	925	300	20	40	2.3	20	1150	2450	
TFMOV34S621Lx	385	505	558	682	1025	300	20	40	2.3	20	1250	2200	
TFMOV34S681Lx	420	560	612	748	1120	300	20	40	2.3	20	1250	2000	

Note:

a: $R_{cl} = \frac{V_C}{V_N}$, $U_p \geq V_C$, V_C : Clamping Voltage (@ I_n), V_N : Varistor Voltage, U_p : Voltage Protection Level.

The Value of Voltage Protection Level (U_p) is determined according to IEC 61643-11:2011 clause 6.4.

Preferred values of voltage protection level (kV): 0.08, 0.09, 0.10, 0.12, 0.15, 0.22, 0.33, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.2, 1.5, 1.8, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0, 10.


TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Performance Curve for Reference


Limited Current Test Curve (UL 1449 clause 44.4)

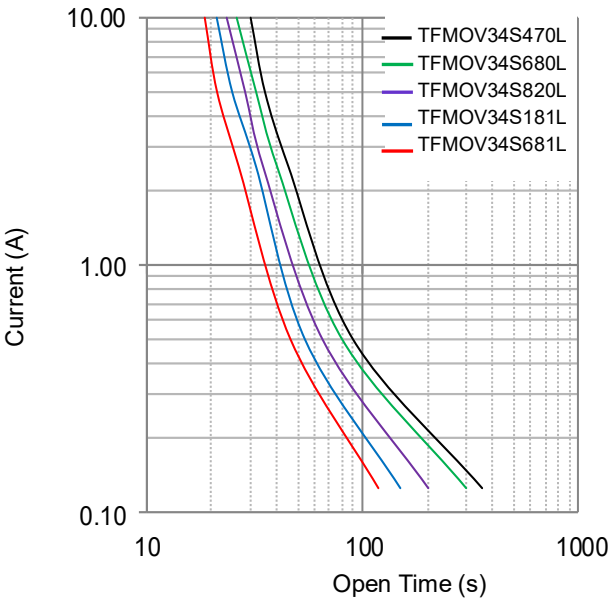


Note: The limited current curve is for reference only.

Max. Peak Current Derating Curve

TFMOV34S470L to TFMOV34S680L

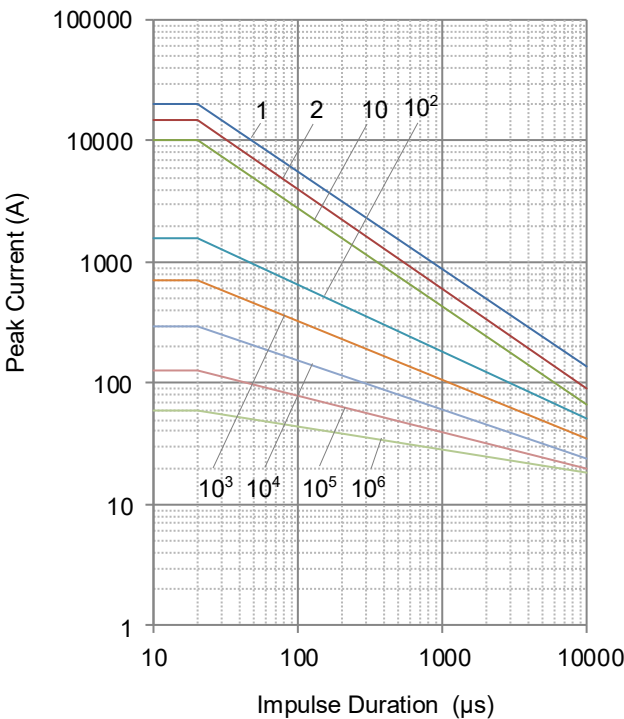

TFMOV34S820L to TFMOV34S681L

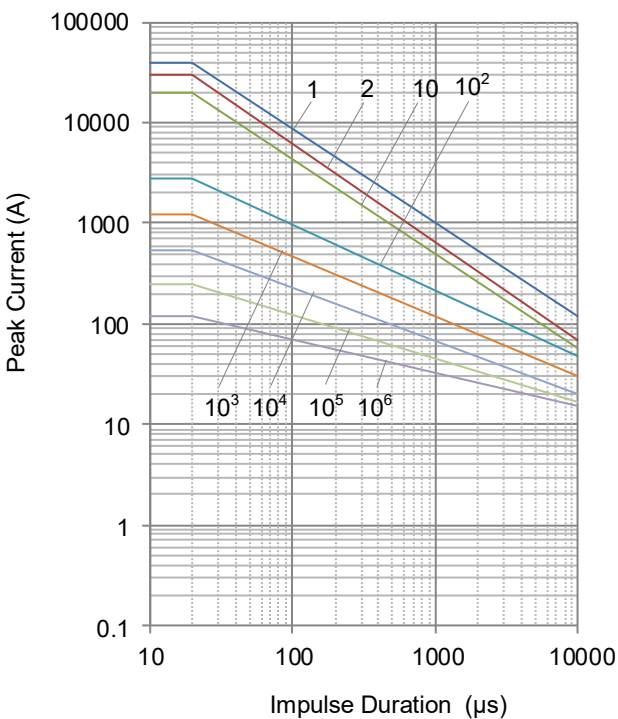



Note: 1, 2, 10, 10², 10³, 10⁴, 10⁵, 10⁶ Stand for repetitions.

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Voltage-Current Characteristic Curves

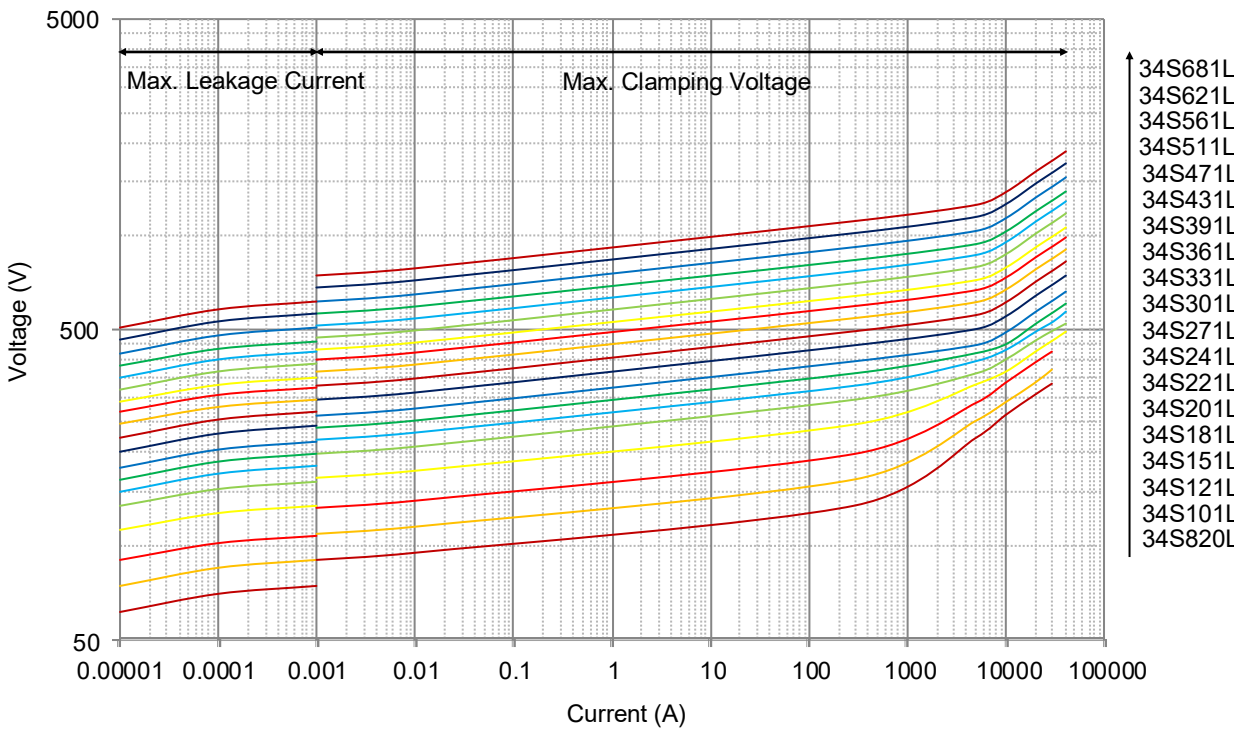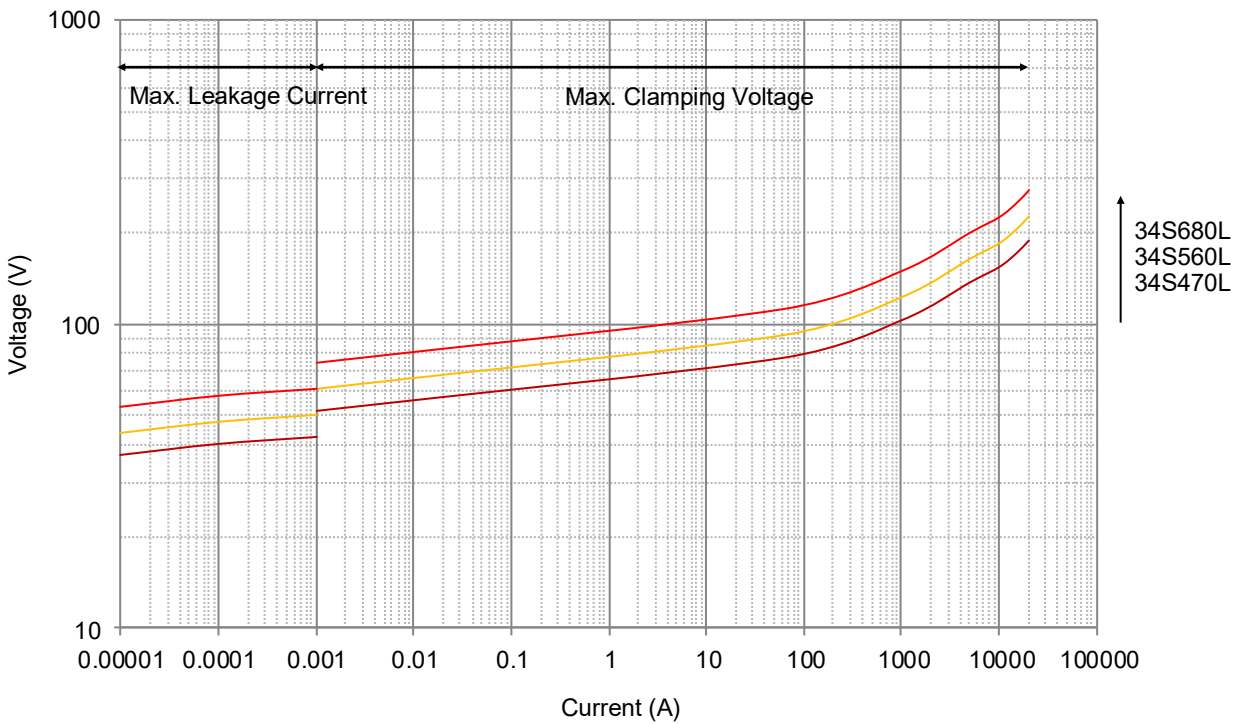


TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Wave Soldering Parameters (Reference)

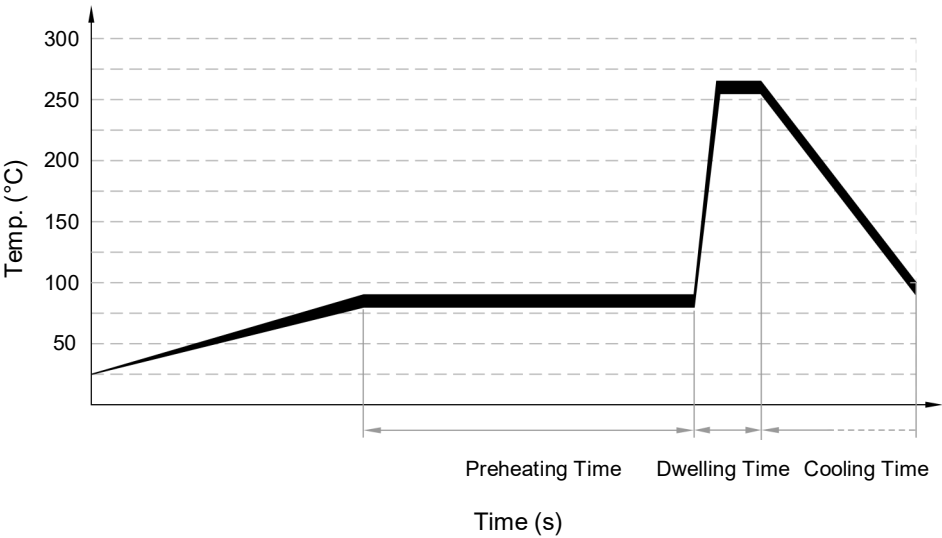

Item	Temp. (°C)	Time (s)
Preheating	80 to 90	60 to 150
Dwelling	250 to 260	2 to 4

Recommended Hand-Soldering Parameters





Item	Condition
Iron Temperature	350 °C (Max.)
Soldering Time	4 seconds (Max.)
Distance between Soldering Point and the Bottom of Product	2 mm (Min.)

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Application Options

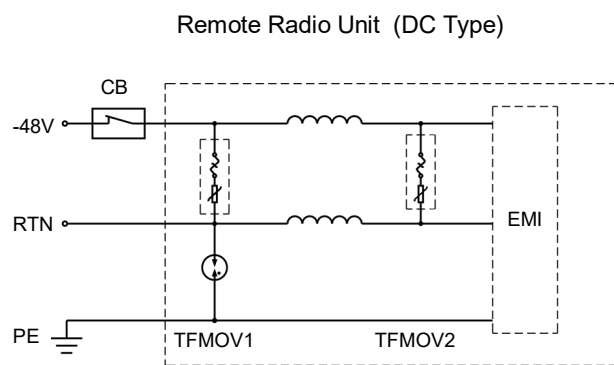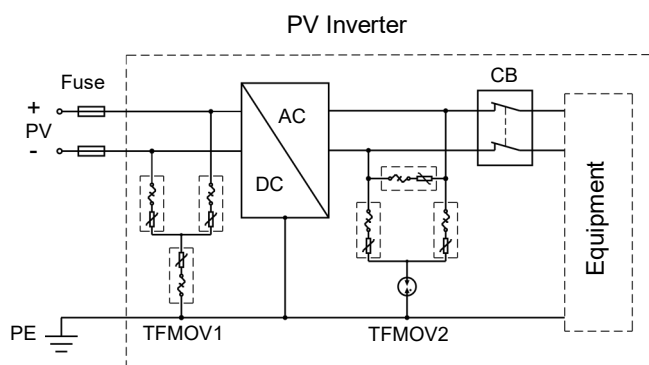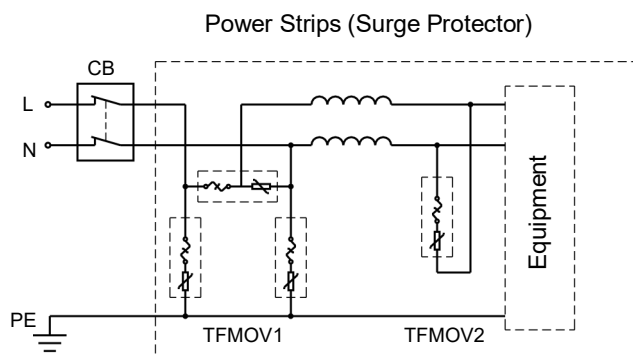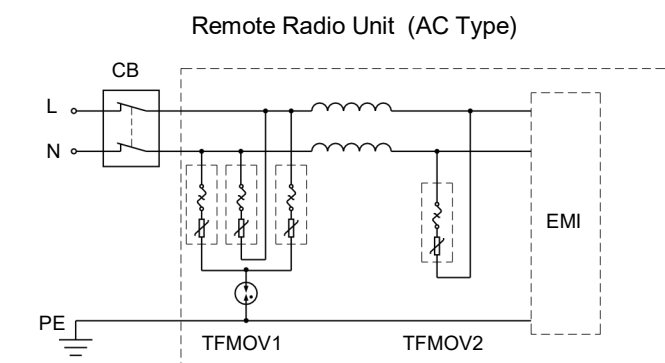

Design

When a single TFMOV surge capacity can't meet the requirement of customers, paralleling more TFMOVs is recommended. Due to its nonlinear current-voltage characteristics, please pay attention to below tips:

1. Use the TFMOV from the same manufacturer with same model to parallel.
2. Control the varistor voltage; Typically, the varistor voltage deviation should be less than 1% in the same group (between the Max and Min), and meet the next tip at the same time.
3. Calculate the average surge capacity for each TFMOV and keep a margin at least 10%.
4. Design the layout like Figure.2. to make sure the surge capacity is divided averagely.

The Design not Recommended

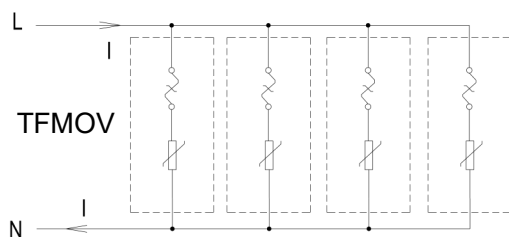


Figure .1

The Design Recommended

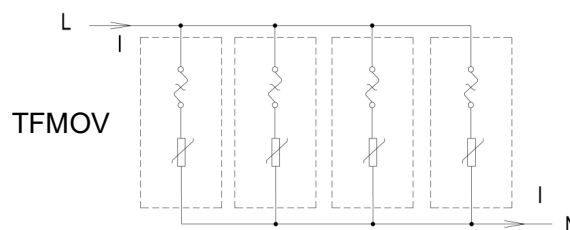



Figure .2

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

MOV Operation Principle

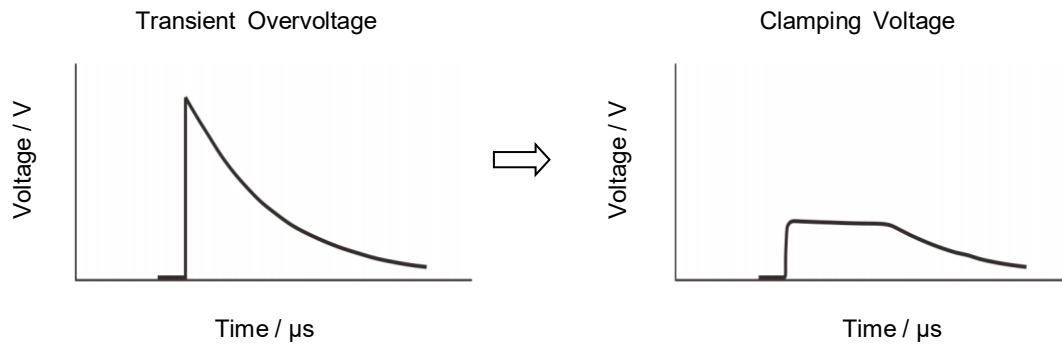

MOV Thermal Protection

Figure a is a surge protection circuit commonly used in power supplies. MOV is used to suppress the surge voltage and protect the subsequent circuit. There is a risk of burning when the varistor degrades or fails. In the high-reliability surge protection circuit of Figure b, in order to improve the safety of the circuit, a thermal protection varistor TFMOV is used as the surge voltage protection element. TFMOV is a combination of varistors (MOV) and thermal protection component. When the temperature of the MOV is abnormally exceeded, the thermal fuse will be opened first, so that the failure mode of the MOV appears to be open-circuit failure.

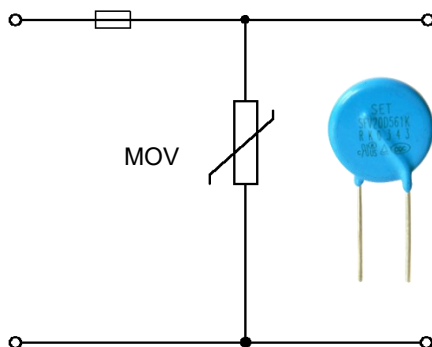


Figure a Typical surge protection circuit

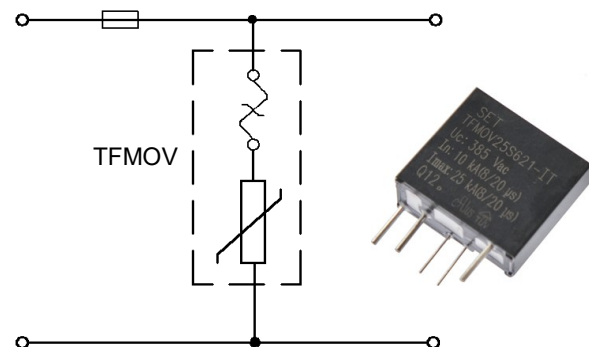



Figure b: High reliability surge protection circuit

TFMOV


Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Benefits



Safety

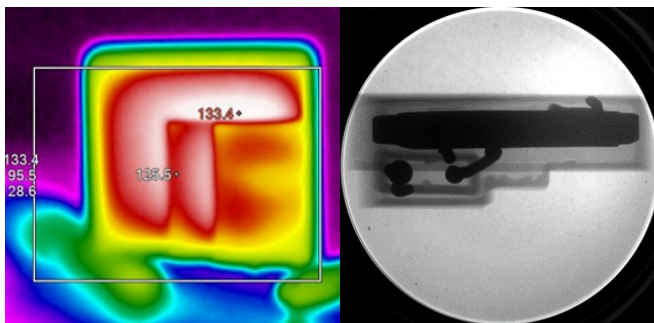


TFMOV Failure Simulation


During the electrical performance degrading of varistor, the inbuilt ATCO will open the circuit when the leakage current of varistor increases to tens of micro Amperes. As shown in the figure above, this is a safe open circuit failure.



Hidden Danger



Hole in Varistor



MOV Failure Simulation

The electrical performance of varistor degrades with operating, mostly the varistor voltage drops, and leakage current increases. The heat accumulation can cause the temperature increase sharply and varistor results in thermal breakdown to short circuit status. It's very dangerous.

Glossary

Item	Description
V_N	Nominal Varistor Voltage Voltage, at specified d.c. current used as a reference point in the component characteristic.
8/20 μ s	8/20 Current Impulse Current impulse with a nominal virtual front time of 8 μ s and a nominal time to half-value of 20 μ s. — (IEC 61643-11)
1.2/50 μ s	1.2/50 Voltage Impulse Voltage impulse with a nominal virtual front time of 1.2 μ s and a nominal time to half-value of 50 μ s. — (IEC 61643-11)
U_c	Maximum Continuous Operating Voltage Maximum r.m.s. voltage, which may be continuously applied to the SPD's mode of protection. — (IEC 61643-11)
I_n	Nominal Discharge Current Crest value of the current through the SPD having a current waveshape of 8/20 μ s. — (IEC 61643-11)
I_{imp}	Impulse Discharge Current for Class I Test Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time. — (IEC 61643-11)
I_{max}	Maximum Discharge Current Crest value of a current through the SPD having an 8/20 μ s waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n . — (IEC 61643-11)
V_c	Clamping Voltage Peak voltage developed across the varistor terminations under standard atmospheric conditions, when passing an 8/20 μ s class current pulse.
C_v	Capacitance Capacitance across the MOV measured at a specified frequency and voltage.
Modes of protection	Modes of protection An intended current path, between terminals that contains protective components, e.g. line-to-line, line-to-earth, line-to-neutral, neutral-to-earth. — (IEC 61643-11)
U_p	Voltage Protection Level Maximum voltage to be expected at the SPD terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and wave shape. — (IEC 61643-11)
TCO	Thermal-Link A non-resettable device incorporating a THERMAL ELEMENT which will open a circuit once only when exposed for a sufficient length of time to a temperature in excess of that for which it has been designed.
ATCO	Alloy Thermal-Link Alloy Type Thermal-Link, Alloy is the thermal element.
MOV	Varistors A resistive device with nonlinear voltammetry characteristics

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV34SxxxL Series

Patents

Name	Region	Category	Patent NO.
Varistor with In-built Alloy-Type Thermal Fuse	China	Patent for Invention	ZL 200510044661.5
A Protection Pluggable Module with Over Current、Over Voltage、and Over Temperature Protection Function	China	Utility Model	ZL 201020244488.X
A Varistor with Double Protection Function	China	Utility Model	ZL 201020255481.8
Surge Protection Module Applicable for Power Strip	China	Utility Model	ZL 201120107173.5
A Surge Protection Module Applicable for Power Strip	China	Patent for Invention	ZL 201110092261.7
A New Type of Varistor and Surge Protective Device with Thermal Protection	China	Utility Mode	ZL 201420306127.1
A Surge Protective Device	China	Utility Modeel	ZL 201420415059.2
A Varistor and Thermal Protection Component Combination	China	Utility Mode	ZL 201520376567.9
合金型温度ヒューズ付のバリスタ	Japan	Utility Mode	3142835
Varistor with an Alloy-Type Temperature Fuse	Australia	Utility Mode	2007100456
Varistor with an Alloy-Type Temperature Fuse	Taiwan	Utility Model	M 300855
Varistor with an Alloy-type Temperature Fuse	Canada	Patent for Invention	2588819
Metal Oxide Varistor with Built-in Alloy-Type Temperature Fuse	USA	Patent for Invention	US 8780521
Varistor with In-built Alloy Type Thermal Fuse (with Housing)	USA	Patent for Invention	US 9355763



ATTENTION

Usage

1. Frequency range is from 47 Hz to 63 Hz.
2. The voltage applied continuously to the TFMOV can not exceed its maximum continuous operating voltage U_c .
3. When atmosphere pressure is from 80 kPa to 106 kPa, the related altitude shall be from 2000 meters to - 500 meters.
4. Do not touch the product body or pins directly when power is on, to avoid electric shock.
5. Do not clean the TFMOV with strong polar solvent such as ketone, esters, benzene, halogenated hydrocarbon, to avoid damaging the enclosure.
6. It should have a reliable grounding when using these products.

Replacement

TFMOV is a non-repairable product. For safety sake, please use equivalent TFMOV for replacement.

Storage

Do not store TFMOV at high temperature, high humidity or corrosive gas environment. To avoid reducing the solderability of the pins, please use them up within 1 year after receiving the goods.

Installation Position

Do not install the TFMOV on a place that may often suffer severe continuous vibration.

Mechanical Stress

Do not take violent action such as knocking when assembling to avoid mechanical damage.

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)													Maximum Continuous Operating Voltage U_n (V)		Model
			AC	DC	1	1.5	2.5	3	4	5			AC	DC	
690V	600V		○	○	○	○	○	○	○	○	○	○	750	1000	TFMOV10S821 TFMOV10S751 TFMOV10S681 TFMOV10S621 TFMOV10S561 TFMOV10S511 TFMOV10S471 TFMOV10S431 TFMOV10S391 TFMOV10S361 TFMOV10S331 TFMOV10S301 TFMOV10S271 TFMOV10S241 TFMOV10S221 TFMOV10S201 TFMOV10S181 TFMOV10S151 TFMOV10S121 TFMOV10S101 TFMOV10S820 TFMOV10S680 TFMOV10S560 TFMOV10S470 TFMOV10S390 TFMOV10S330 TFMOV10S270
			○	○	○	○	○	○	○	○	○	○	○	680	
480V		○	○	○	○	○	○	○	○	○	○	625	825		
		○	○	○	○	○	○	○	○	○	○	550	745		
347V	400V		○	○	○	○	TFMOV10S821	○	○	TFMOV15S821	○	○	510	670	
			○	○	○	○	TFMOV10S751	○	○	TFMOV15S751	○	○	460	615	
	254 - 277V		○	○	○	○	TFMOV10S681	○	○	TFMOV15S681	○	○	420	560	
			○	○	○	○	TFMOV10S621	○	○	TFMOV15S621	○	○	385	505	
220 - 230V	300V		○	○	○	○	TFMOV10S561	○	○	TFMOV15S561	○	○	350	460	
			○	○	○	○	TFMOV10S511	○	○	TFMOV15S511	○	○	320	415	
	120 - 130V		○	○	○	○	TFMOV10S471	○	○	TFMOV15S471	○	○	300	385	
			○	○	○	○	TFMOV10S431	○	○	TFMOV15S431	○	○	275	350	
	220V		○	○	○	○	TFMOV10S391	○	○	TFMOV15S391	○	○	250	320	
			○	○	○	○	TFMOV10S361	○	○	TFMOV15S361	○	○	230	300	
	110V		○	○	○	○	TFMOV10S331	○	○	TFMOV15S331	○	○	210	275	
			○	○	○	○	TFMOV10S301	○	○	TFMOV15S301	○	○	190	250	
			○	○	○	○	TFMOV10S271	○	○	TFMOV15S271	○	○	175	225	
			○	○	○	○	TFMOV10S241	○	○	TFMOV15S241	○	○	150	200	
110V			○	○	○	○	TFMOV10S221	○	○	TFMOV15S221	○	○	140	180	
			○	○	○	○	TFMOV10S201	○	○	TFMOV15S201	○	○	130	170	
	60V		○	○	○	○	TFMOV10S181	○	TFMOV20S181Lx	TFMOV15S181	TFMOV20S181	○	115	150	
			○	○	TFMOV20S680Lx	TFMOV10S151	○	TFMOV20S151Lx	TFMOV15S151	TFMOV20S151	○	95	125		
48V	60V		○	TFMOV10S121	TFMOV15S121	TFMOV20S560Lx	○	○	TFMOV20S121Lx	○	TFMOV20S121x	○	75	100	
			○	TFMOV10S101	TFMOV15S101	TFMOV20S470Lx	○	○	TFMOV20S101Lx	○	TFMOV20S101x	○	60	85	
	48V		○	TFMOV10S820	TFMOV15S820	○	○	○	TFMOV20S820Lx	○	TFMOV20S820x	○	50	65	
			TFMOV10S680	TFMOV15S680	TFMOV20S680x	○	TFMOV25D680x	○	○	○	TFMOV25S680x	TFMOV25S680Lx	40	56	
24V	24V		TFMOV10S560	TFMOV15S560	TFMOV20S560x	○	TFMOV25D560x	○	○	○	TFMOV25S560x	TFMOV25S560Lx	35	45	
			TFMOV10S470	TFMOV15S470	TFMOV20S470x	○	○	TFMOV25S470Lx	○	○	○	○	30	38	
			TFMOV10S390	TFMOV15S390	○	○	○	○	○	○	○	○	25	31	
			TFMOV10S330	TFMOV15S330	○	○	○	○	○	○	○	○	20	26	
12V	12V		TFMOV10S270	TFMOV15S270	○	○	○	○	○	○	○	○	17	22	

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)												Maximum Continuous Operating Voltage U_n (V)		Model
690V	600V		TFMOV20S122x	○	○	○	TFMOV25D122x	TFMOV25S122x	○	○	○	750	1000	Maximum Continuous Operating Voltage U_n (V)
			TFMOV20S112x	○	○	○	TFMOV25D112x	TFMOV25S112x	○	○	○	680	895	
480V			TFMOV20S102x	○	○	○	TFMOV25D102x	TFMOV25S102x	○	○	○	625	825	
			TFMOV20S911x	○	○	○	TFMOV25D911x	TFMOV25S911x	○	○	○	550	745	
	400V		TFMOV20S821x	○	○	○	TFMOV25D821x	TFMOV25S821x	○	○	○	510	670	
347V			TFMOV20S751x	○	○	○	TFMOV25D751x	TFMOV25S751x	○	○	○	460	615	
			TFMOV20S681x	TFMOV20S681Lx	○	○	TFMOV25D681x	TFMOV25S681x	TFMOV25S681Lx	○	○	420	560	
	254		TFMOV20S621x	TFMOV20S621Lx	○	○	TFMOV25D621x	TFMOV25S621x	TFMOV25S621Lx	○	○	385	505	
220	277V		TFMOV20S561x	TFMOV20S561Lx	○	○	TFMOV25D561x	TFMOV25S561x	TFMOV25S561Lx	○	○	350	460	
230V			TFMOV20S511x	TFMOV20S511Lx	○	○	TFMOV25D511x	TFMOV25S511x	TFMOV25S511Lx	○	○	320	415	
	300V		TFMOV20S471x	TFMOV20S471Lx	○	○	TFMOV25D471x	TFMOV25S471x	TFMOV25S471Lx	○	○	300	385	
			TFMOV20S431x	TFMOV20S431Lx	○	○	TFMOV25D431x	TFMOV25S431x	TFMOV25S431Lx	○	○	275	350	
			TFMOV20S391x	TFMOV20S391Lx	○	○	TFMOV25D391x	TFMOV25S391x	TFMOV25S391Lx	○	○	250	320	
	120		TFMOV20S361x	TFMOV20S361Lx	○	○	TFMOV25D361x	TFMOV25S361x	TFMOV25S361Lx	○	○	230	300	
	130V		TFMOV20S331x	TFMOV20S331Lx	○	○	TFMOV25D331x	TFMOV25S331x	TFMOV25S331Lx	○	○	210	275	
			TFMOV20S301x	TFMOV20S301Lx	○	○	TFMOV25D301x	TFMOV25S301x	TFMOV25S301Lx	○	○	190	250	
			TFMOV20S271x	TFMOV20S271Lx	○	○	TFMOV25D271x	TFMOV25S271x	TFMOV25S271Lx	○	○	175	225	
110V	110V		TFMOV20S241x	TFMOV20S241Lx	○	○	TFMOV25D241x	TFMOV25S241x	TFMOV25S241Lx	○	○	150	200	
			TFMOV20S221x	TFMOV20S221Lx	○	○	TFMOV25D221x	TFMOV25S221x	TFMOV25S221Lx	○	○	140	180	
			TFMOV20S201x	TFMOV20S201Lx	○	○	TFMOV25D201x	TFMOV25S201x	TFMOV25S201Lx	○	○	130	170	
			○	○	TFMOV25S181x	TFMOV25S181Lx	○	○	○	○	TFMOV20K181x	115	150	
	60V	60V	○	○	TFMOV25S151x	TFMOV25S151Lx	○	○	○	○	TFMOV20K151x	95	125	
48V			○	○	TFMOV25S121x	TFMOV25S121Lx	○	○	○	○	TFMOV34S121x	75	100	
	48V		○	○	TFMOV25S101x	TFMOV25S101Lx	○	○	○	TFMOV34S680Lx	TFMOV34S101x	60	85	
	36V		○	○	TFMOV25S820x	TFMOV25S820Lx	○	○	○	TFMOV34S560Lx	TFMOV34S820x	50	65	
			○	○		○	TFMOV34S680x	○	○	TFMOV34S470Lx	○	40	56	
24V		24V	○	○		○	TFMOV34S560x	○	○	○	○	35	45	
			○	○		○	TFMOV34S470x	○	○	○	○	30	38	
			○	○		○	○	○	○	○	○	25	31	
12V		12V	○	○		○	○	○	○	○	○	20	26	
			○	○		○	○	○	○	○	○	17	22	
AC	DC		7.5		8		10	10 $I_{\max} = 2.5 I_n$		10		15	AC	DC
		Nominal Discharge Current I_n (kA)												

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)			Model										Maximum Continuous Operating Voltage U_n (V)	
690V	600V		○	TFMOV20K122x	○	TFMOV34S122x	○	○	TFMOV40K122x	○	750	1000		
			○	TFMOV20K112x	○	TFMOV34S112x	○	○	TFMOV40K112x	○	680	895		
480V			○	TFMOV20K102x	○	TFMOV34S102x	○	○	TFMOV40K102x	○	625	825		
	400V		○	TFMOV20K911x	TFMOV20K550x	TFMOV34S911x	○	○	TFMOV40K911x	TFMOV40K550x	550	745		
347V			○	TFMOV20K821x	○	TFMOV34S821x	○	○	TFMOV40K821x	○	510	670		
			○	TFMOV20K751x	TFMOV20K460x	TFMOV34S751x	○	○	TFMOV40K751x	TFMOV40K460x	460	615		
			○	TFMOV20K681x	○	TFMOV34S681x	TFMOV34S681Lx	○	TFMOV40K681x	○	420	560		
	254 - 277V		○	TFMOV20K621x	○	TFMOV34S621x	TFMOV34S621Lx	○	TFMOV40K621x	○	385	505		
220 - 230V			○	TFMOV20K561x	TFMOV20K350x	TFMOV34S561x	TFMOV34S561Lx	○	TFMOV40K561x	TFMOV40K350x	350	460		
			○	TFMOV20K511x	○	TFMOV34S511x	TFMOV34S511Lx	○	TFMOV40K511x	○	320	415		
	300V		○	TFMOV20K471x	○	TFMOV34S471x	TFMOV34S471Lx	○	TFMOV40K471x	○	300	385		
			○	TFMOV20K431x	TFMOV20K300x	TFMOV34S431x	TFMOV34S431Lx	○	TFMOV40K431x	TFMOV40K300x	275	350		
			○	TFMOV20K391x	○	TFMOV34S391x	TFMOV34S391Lx	○	TFMOV40K391x	○	250	320		
	220V		○	TFMOV20K361x	○	TFMOV34S361x	TFMOV34S361Lx	○	TFMOV40K361x	○	230	300		
			○	TFMOV20K331x	○	TFMOV34S331x	TFMOV34S331Lx	○	TFMOV40K331x	○	210	275		
			○	TFMOV20K301x	○	TFMOV34S301x	TFMOV34S301Lx	○	TFMOV40K301x	○	190	250		
			○	TFMOV20K271x	○	TFMOV34S271x	TFMOV34S271Lx	○	TFMOV40K271x	○	175	225		
	110V		○	TFMOV20K241x	TFMOV20K150x	TFMOV34S241x	TFMOV34S241Lx	○	TFMOV40K241x	TFMOV40K150x	150	200		
110V			○	TFMOV20K221x	○	TFMOV34S221x	TFMOV34S221Lx	○	TFMOV40K221x	○	140	180		
			○	TFMOV20K201x	○	TFMOV34S201x	TFMOV34S201Lx	○	TFMOV40K201x	○	130	170		
			○	○	○	TFMOV34S181x	TFMOV34S181Lx	○	TFMOV40K181x	○	115	150		
	60V	60V	○	○	○	TFMOV34S151x	TFMOV34S151Lx	○	○	○	95	125		
48V			TFMOV34S121Lx	○	○	○	○	○	○	○	75	100		
	48V		TFMOV34S101Lx	○	○	○	○	TFMOV40K121x	○	○	60	85		
	36V		TFMOV34S820Lx	○	○	○	○	TFMOV40K101x	○	○	50	65		
			○	○	○	○	○	TFMOV40K820x	○	○	40	56		
24V		24V	○	○	○	○	○	○	○	○	35	45		
			○	○	○	○	○	○	○	○	30	38		
			○	○	○	○	○	○	○	○	25	31		
12V		12V	○	○	○	○	○	○	○	○	20	26		
			○	○	○	○	○	○	○	○	17	22		
AC	DC		15	20 $I_{\max} = 2.5I_n$		20		30		40		AC	DC	
Nominal Discharge Current I_n (kA)														

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)								Maximum Continuous Operating Voltage U_n (V)		Model
								AC	DC	
690V	600V	○	○	○	○	○	○	750	1000	
		○	○	○	○	○	○	680	895	
480V		○	○	○	○	○	○	625	825	
	400V	○	○	○	○	○	○	550	745	
347V		○	○	○	○	○	○	510	670	
		○	○	○	○	○	○	460	615	
	254	○	○	○	○	○	○	420	560	
220	277V	○	○	○	○	○	○	385	505	
		○	○		○	○	○	350	460	
230V	300V	○	○	TFMOV21R2P511	○	○	TFMOV21R3P511	320	415	
		○	○	TFMOV21R2P471	○	○	TFMOV21R3P471	300	385	
		○	○	TFMOV21R2P431	○	○	TFMOV21R3P431	275	350	
		○	○	TFMOV21R2P391	○	○	TFMOV21R3P391	250	320	
	120	○	○	TFMOV21R2P361	○	○	TFMOV21R3P361	230	300	
	130V	○	○	TFMOV21R2P331	○	○	TFMOV21R3P331	210	275	
		○	○	TFMOV21R2P301	○	○	TFMOV21R3P301	190	250	
		○	○	TFMOV21R2P271	○	○	TFMOV21R3P271	175	225	
	110V	○	○	TFMOV21R2P241	○	○	TFMOV21R3P241	150	200	
110V		○	○	TFMOV21R2P221	○	○	TFMOV21R3P221	140	180	
		○	○	TFMOV21R2P201	○	○	TFMOV21R3P201	130	170	
		○	TFMOV21R2P181	○	○	TFMOV21R3P181	○	115	150	
	60V	○	TFMOV21R2P151	○	○	TFMOV21R3P151	○	95	125	
48V	60V	○	TFMOV21R2P121	○	○	TFMOV21R3P121	○	75	100	
	48V	○	TFMOV21R2P101	○	○	TFMOV21R3P101	○	60	85	
	36V	○	TFMOV21R2P820	○	○	TFMOV21R3P820	○	50	65	
		TFMOV21R2P680	○	○	TFMOV21R3P680	○	○	40	56	
24V	24V	TFMOV21R2P560	○	○	TFMOV21R3P560	○	○	35	45	
		TFMOV21R2P470	○	○	TFMOV21R3P470	○	○	30	38	
		○	○	○	○	○	○	25	31	
12V	12V	○	○	○	○	○	○	20	26	
		○	○	○	○	○	○	17	22	
AC	DC	2.5 x 2	5 x 2	7.5 x 2	2.5 x 3	5 x 3	7.5 x 3	AC	DC	
		Nominal Discharge Current I_n (kA)								